


DENSITRON CORPORATION
PCX510

Card Type	Video card
Video Chip Set	Chips and Technology
Maximum Video Memory	Unidentified
Data Bus	16-bit ISA
Video Types Supported	VGA,EGA, CGA, MDA
Highest Resolution Supported	640 x 480

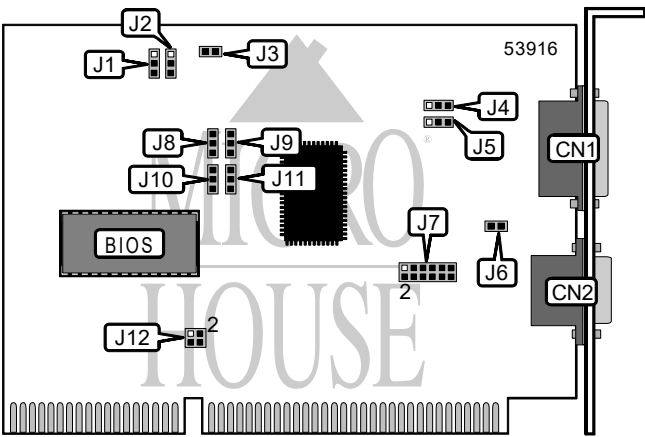

CONNECTIONS			
Function	Label	Function	Label
Serial port	CN1	15-pin video analog video port	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Vee reference select +5v	J1	Pins 1 & 2 closed
Vee reference select ground	J1	Pins 2 & 3 closed
Vee polarity select positive	J2	Pins 1 & 2 closed
Vee polarity select negative	J2	Pins 2 & 3 closed
í Factory configured - do not alter	J3	Closed
Shift lock select normal	J4	Pins 2 & 3 closed
Shift lock select inverted	J4	Pins 1 & 2 closed
Backlight control select normal	J5	Pins 2 & 3 closed
Backlight control select inverted	J5	Pins 1 & 2 closed
Serial port enabled	J6	Closed
Serial port disabled	J6	Open
í Factory configured - do not alter	J8	Unidentified
í Factory configured - do not alter	J9	Unidentified
í Factory configured - do not alter	J10	Unidentified
í Factory configured - do not alter	J11	Unidentified

Continued on next page. . .

DENSITRON CORPORATION

P C X 5 1 0

. . . continued from previous page

SERIAL PORT SELECTION	
Setting	J12
COM1	Open
COM2	Pins 2 & 4 closed
COM3	Pins 1 & 3 closed
COM4	Pins 1 & 3, 2 & 4 closed

IRQ SELECTION	
IRQ	J7
IRQ3	Pins 7 & 8 closed
IRQ4	Pins 9 & 10 closed
IRQ6	Pins 11 & 12 closed
IRQ7	Pins 1 & 2 closed
IRQ10	Pins 3 & 4 closed
IRQ11	Pins 5 & 6 closed
None	Open