


REVEAL COMPUTER PRODUCTS

SC400 PRO 16 (REV. 4A)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Line in, microphone in, line out, speaker out, game/MIDI port, audio in - CD-ROM, CD-ROM interfaces (4), wavetable connector
Data Bus	16-bit ISA

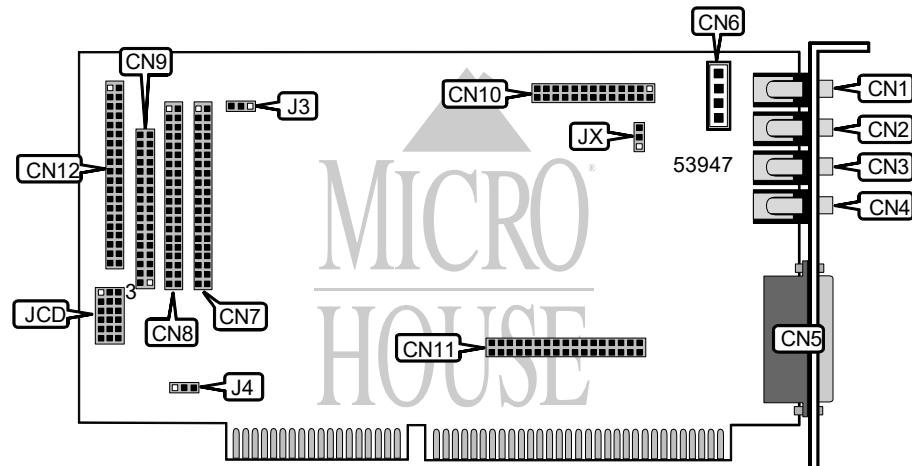

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	CD-ROM interface (Panasonic)	CN7
Microphone in	CN2	CD-ROM interface (Mitsumi)	CN8
Line out	CN3	CD-ROM interface (Sony)	CN9
Speaker out	CN4	Wavetable connector	CN10
Game/MIDI port	CN5	Expansion connector	CN11
Audio in - CD-ROM	CN6	CD-ROM interface (IDE)	CN12

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured – do not alter (microphone select)	JX	Unidentified
Programmable EEPROM enabled	J3	Pins 1 & 2 closed
Programmable EEPROM disabled	J3	Pins 2 & 3 closed

BASE I/O ADDRESS SELECTION	
Address	J4
220	Pins 1 & 2 closed
240	Pins 2 & 3 closed

Continued on next page. . .

REVEAL COMPUTER PRODUCTS

SC400 PRO 16 (REV. 4A)

. . . continued from previous page

IDE CD-ROM PORT SELECTION		
Port	Port enabled	Port disabled
1	JCD/pins 1 & 2 closed	JCD/pins 2 & 3 closed
2	JCD/pins 4 & 5 closed	JCD/pins 5 & 6 closed
3	JCD/pins 7 & 8 closed	JCD/pins 8 & 9 closed
4	JCD/pins 10 & 11 closed	JCD/pins 11 & 12 closed
5	JCD/pins 13 & 14 closed	JCD/pins 14 & 15 closed
6	JCD/pins 16 & 17 closed	JCD/pins 17 & 18 closed