


EQUINOX SYSTEMS, INC.

SST-8I MULTIPORT BOARD

Card Type	Multi-I/O card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (8 RS-232 or 8 RJ-45)
Hard Drives supported	None
Floppy drives supported	None
Data Bus	16-bit ISA

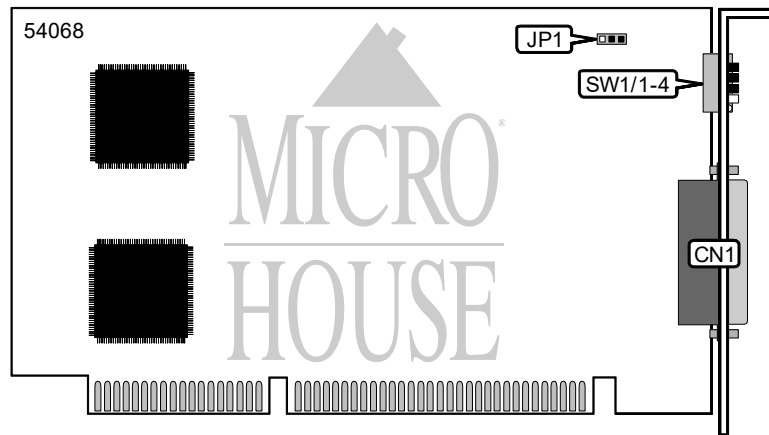

CONNECTIONS	
Function	Label
Serial ports via DB-25 connector	CN1
Note: Fan out cables provide either eight DB-25 connectors or eight RJ-45 connectors	

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Plug and play enabled, SW1 disabled	JP1	Pins 1 & 2 closed
Plug and play disabled, SW1 enabled	JP1	Pins 2 & 3 closed
Note: When plug and play is enabled, SW1 is disabled		

BASE I/O ADDRESS SELECTION				
Setting	SW 1/1	SW 1/2	SW 1/3	SW 1/4
200h	Off	Off	Off	Off
220h	On	Off	Off	Off
240h	Off	On	Off	Off
260h	On	On	Off	Off
280h	Off	Off	On	Off
2A0h	On	Off	On	Off
2C0h	Off	On	On	Off
2E0h	On	On	On	Off
300h	Off	Off	Off	On
320h	On	Off	Off	On
340h	Off	On	Off	On
360h	On	On	Off	On
380h	Off	Off	On	On
3A0h	On	Off	On	On
3C0h	Off	On	On	On
3E0h	On	On	On	On