


ACQUTEK CORPORATION

PM-8002

Card Type	Virtual memory card
Chip Set	None
Maximum Onboard Memory	1MB EPROM
I/O Options	Watch dog timer connector
Data Bus	8-bit ISA

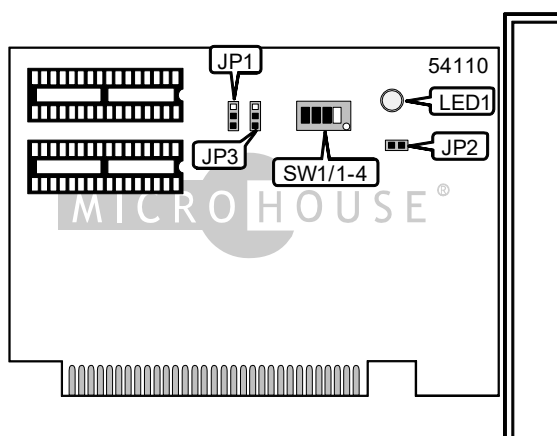

CONNECTIONS	
Function	Label
Watch-dog timer reset connector	JP2
Note: Watch-dog timer reset connector can be connected to mother board or CPU card's reset connector.	

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured - do not alter	JP1	Unidentified
Factory configured - do not alter	JP3	Pins 1 & 2 closed

DIAGNOSTIC LED	
Function	Label
Watch dog timer status indicator	L1
Note: When watch-dog timer is enabled, LED will start to blink. The user must refresh the watch-dog time every 6 to 42 seconds or the LED will stop blinking and the watch-dog timer will reset the system.	

BIOS ADDRESS SELECTION		
Address	SW1/3	SW1/4
CC000h	Off	Off
D0000h	On	Off
D4000h	Off	On
D8000h	On	On

BASE I/O ADDRESS SELECTION		
Setting	SW1/1	SW1/2
218h	Off	Off
298h	On	Off
318h	Off	On
398h	On	On

MISCELLANEOUS TECHNICAL NOTES
The following 2 chip memory kits are available: MK-2E10 (256KB), MK-2E20 (512 KB), MK-2E40 (1MB)