


3COM CORPORATION  
US ROBOTICS 14,400 INTERNAL

Modem Type	Data (synchronous/asynchronous)/Fax
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103A/212A
	ITU-T V.22, V.22bis, V.23, V.32, V.32bis, V.25
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

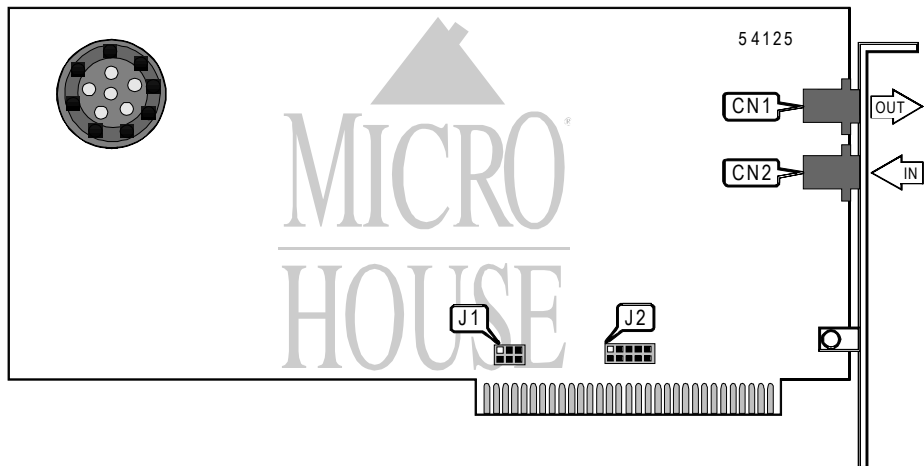

CONNECTIONS			
Purpos	Location	Purpos	Location
Line in	CN2	Line out	CN1

COM PORT SETTINGS			
COM	1/1	1/2	1/3
COM1	Closed	Closed	Closed
COM2	Open	Closed	Closed
COM3	Closed	Open	Closed
COM4	Open	Open	Closed

Continued on next page . . .

3COM CORPORATION  
US ROBOTICS 14,400 INTERNAL

...continued from previous page

INTERRUPT SELECT					
Interrupt	J2/1	J2/2	J2/3	J2/4	J2/5
IRQ2	Closed	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Closed

### Proprietary AT Command Set

See document V1250 for a full command summary.