


# 3COM CORPORATION

## US ROBOTICS WINMODEM 14.4

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| Card Type                | Fax, Modem (asynchronous)                            |
| Chip Set                 | U.S. Robotics                                        |
| Maximum Data Rate        | 14.4Kbps                                             |
| Maximum Fax Rate         | 14.4Kbps                                             |
| Data Bus                 | 8-bit ISA                                            |
| Fax Class                | Class I                                              |
| Data Modulation Protocol | Bell 103/212A                                        |
|                          | ITU-T V.21, V.22, V.22bis, V.23, V.25, V.32, V.32bis |
| Fax Modulation Protocol  | ITU-T V.17, V.21CH2, V.27ter, V.29                   |
| Error                    | MNP5, V.42, V.42bis                                  |
| Correction/Compression   |                                                      |

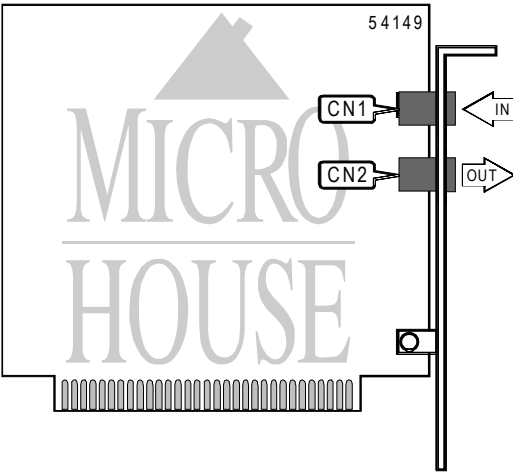

| CONNECTIONS |       |          |       |
|-------------|-------|----------|-------|
| Function    | Label | Function | Label |
| Line in     | CN1   | Line out | CN2   |

### Proprietary AT Command Set

See document V1935 for a full command summary.