


# ANDREW CORPORATION 3X TWIN MULTI-TWIN

**Card Type** Parallel card  
**Maximum Onboard Memory** 128KB  
**I/O Options** Parallel port  
**Data Bus** 8 bit ISA

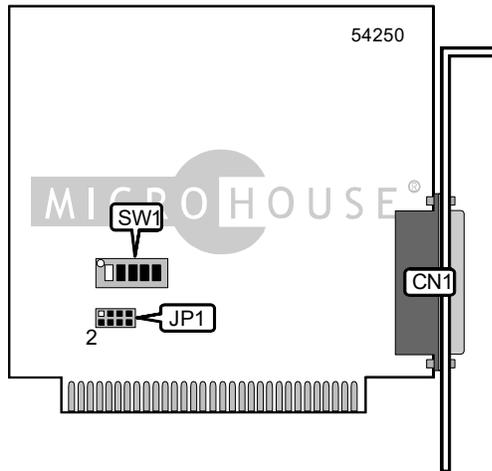

CONNECTIONS	
Function	Label
Parallel port	CN1

**DRAM CONFIGURATION**  
 Note: Card accepts up to 128KB memory. The location is unidentified.

I/O ADDRESS SELECTION					
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
200	Off	On	On	On	On
220	Off	On	On	On	Off
240	Off	On	On	Off	On
260	Off	On	On	Off	Off
280	Off	On	Off	On	On
2A0	Off	On	Off	On	Off
2C0	Off	On	Off	Off	On
2E0	Off	On	Off	Off	Off
300	Off	Off	On	On	On
320	Off	Off	On	On	Off
340	Off	Off	On	Off	On
360	Off	Off	On	Off	Off
380	Off	Off	Off	On	On
3A0	Off	Off	Off	Off	On
3E0	Off	Off	Off	Off	Off

Continued on next page. . .

# ANDREW CORPORATION

## 3X TWIN MULTI-TWIN

. . . continued from previous page

PARALLEL PORT INTERRUPT SELECTION				
IRQ	JP1/1 & 2	JP1/3 & 4	JP1/5 & 6	JP1/7 & 8
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed