


DOLPHIN PERIPHERALS, LLC. FASTISA-4032

Card Type Serial card
Chip Set Unidentified
I/O Options Serial ports (2)
Data Bus 16-bit ISA

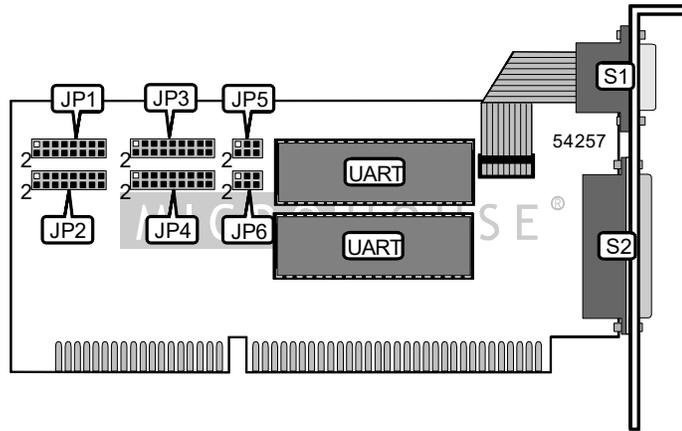

CONNECTIONS				
Function	Label	Function	Label	
Serial port	S1	Serial port	S2	

SERIAL PORT 1 ADDRESS SELECTION	
Setting	JP1
3F8	Pins 1 & 2 closed
2F8	Pins 3 & 4 closed
3E8	Pins 5 & 6 closed
2E8	Pins 7 & 8 closed
3F0	Pins 9 & 10 closed
3E0	Pins 11 & 12 closed
2E0	Pins 13 & 14 closed
260	Pins 15 & 16 closed

SERIAL PORT 2 ADDRESS SELECTION	
Setting	JP2
3F8	Pins 1 & 2 closed
2F8	Pins 3 & 4 closed
3E8	Pins 5 & 6 closed
2E8	Pins 7 & 8 closed
3F0	Pins 9 & 10 closed
3E0	Pins 11 & 12 closed
2E0	Pins 13 & 14 closed
260	Pins 15 & 16 closed

Continued on next page. . .

DOLPHIN PERIPHERALS, LLC.
FASTISA-4032

... continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION	
IRQ	JP3
3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed
9	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed

SERIAL PORT 2 INTERRUPT SELECTION	
IRQ	JP4
3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed
9	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed

SERIAL PORT 1 CLOCK SPEED SELECTION	
Speed	JP5
1.8432MHz	Pins 1 & 2 closed
3.6864MHz	Pins 3 & 4 closed
7.3728MHz	Pins 5 & 6 closed

SERIAL PORT 2 CLOCK SPEED SELECTION	
Speed	JP6
1.8432MHz	Pins 1 & 2 closed
3.6864MHz	Pins 3 & 4 closed
7.3728MHz	Pins 5 & 6 closed