


# KOUWELL ELECTRONIC CORPORATION

## KW-530F

Card Type	Floppy drive controller
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Floppy drive interface (2)
Floppy drives supported	Four 360KB, 720KB, 1.2MB, or 1.44MB drives
Data Bus	8-bit ISA

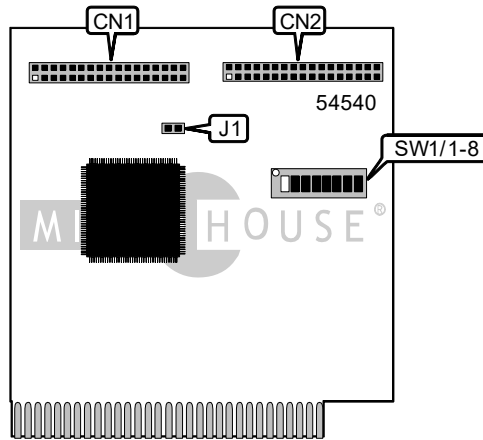

CONNECTIONS			
34-pin cable connector - floppy drive A & B	CN1	34-pin cable connector - floppy drive C & D	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Primary I/O address 3F0-3F7 Hex	J1	Open
Secondary I/O address 370-377 Hex	J1	Closed

SWITCH SETTINGS		
Format	SW1/1,3,5,7	SW1/2,4,6,8
360K	On	On
720K	On	Off
1.2M	Off	On
1.44M	Off	Off