


MULTI-TECH SYSTEMS, INC.

ISI4608PC

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (8) via octopus cable
Hard Drives supported	None
Floppy drives supported	None
Data Bus	16-bit ISA
Card Size	Three-quarter length, full-height

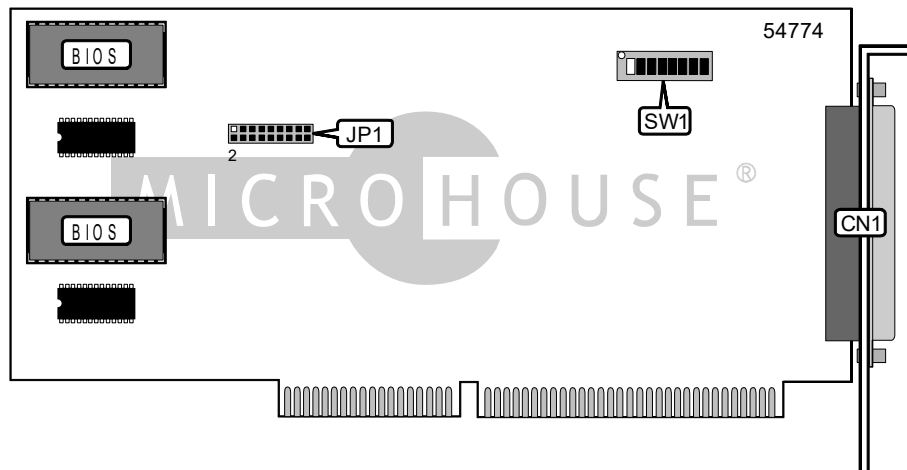

CONNECTIONS	
Function	Label
72 pin connector	CN1

BASE I/O ADDRESS SELECTION								
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100h	On	On	On	On	On	Off	On	On
108h	Off	On	On	On	On	Off	On	On
110h	On	Off	On	On	On	Off	On	On
118h	Off	Off	On	On	On	Off	On	On
120h	On	On	Off	On	On	Off	On	On
128h	Off	On	Off	On	On	Off	On	On
i200h	On	On	On	On	On	On	Off	On
3D8h	Off	Off	On	Off	Off	Off	Off	On
3E0h	On	On	Off	Off	Off	Off	Off	On
3E8h	Off	On	Off	Off	Off	Off	Off	On
3F0h	On	Off	Off	Off	Off	Off	Off	On
3F8h	Off	Off	Off	Off	Off	Off	Off	On
Note:	A total of 255 base address settings are available. The switches are a binary representation of the decimal memory addresses. SW1/8 is the Most Significant Bit and switch SW1/1 is the Least Significant Bit. The switches have the following decimal values: SW1/8=1024, SW1/7=512, SW1/6=256, SW1/5=128, SW1/4=64, SW1/3=32, SW1/2=16, SW1/1=8. Turn off the switches and add the values of the switches to obtain the correct memory address. (Off=1, On=0)							

Continued on next page . . .

MULTI-TECH SYSTEMS, INC.
ISI4608PC SERIAL CARD

Continued from previous page . . .

SERIAL PORT INTERRUPT SELECTION	
IRQ	JP1
2	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed