


PROLINK COMPUTER, INC.

PV-CH7002

| | |
|------------------------------|-------------------------------|
| Card Type | Video Adapter Card |
| Chip Set | Unidentified |
| Maximum Video Memory | Unidentified |
| Video Type: | VGA |
| Highest Resolution Supported | 800 x 600 |
| Data Bus | 8-bit ISA |
| Card Size | Half-length, half-height card |

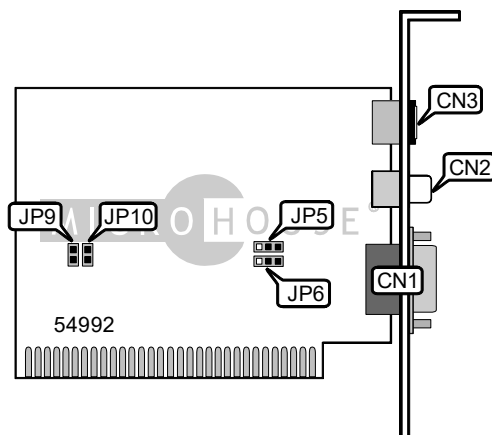

| CONNECTIONS | | | |
|--------------------------|-------|-------------|-------|
| Function | Label | Function | Label |
| 15-pin analog video port | CN1 | S-Video out | CN3 |
| Composite out | CN2 | | |

| I2C SOURCE SELECTION | | | |
|----------------------|-------------------|--|-------------------|
| Selection | JP5 | | JP6 |
| I/O port | Pins 1 & 2 closed | | Pins 1 & 2 closed |
| VGA port | Pins 2 & 3 closed | | Pins 2 & 3 closed |

| BASE I/O ADDRESS SELECTION | | | |
|----------------------------|--------|--|--------|
| Setting | JP9 | | JP10 |
| 150h | Closed | | Closed |
| 550h | Open | | Closed |
| 950h | Closed | | Open |
| D50h | Open | | Open |