

Card Type


Processor

Data Bus

Serial controller

None

8-bit ISA

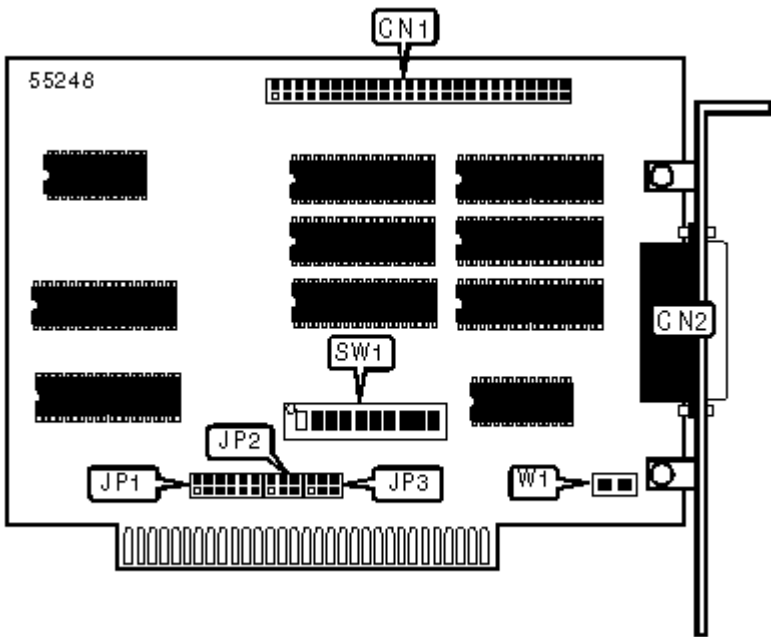

CONNECTIONS

Function	Label	Function	Label
Drive connector - internal	CN1	Ground isolation	W1
Drive connector - external	CN2		

USER CONFIGURABLE SETTINGS

Function	Label	Position
External tape drive select	SW1/10	On
Internal tape drive select	SW1/10	Off

SERIAL PORT 1 INTERRUPT SELECTION

IRQ	JP1
2	Pins 1 & 2 closed
» 3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed

6

Pins 9 & 10 closed

7

Pins 11 & 12 closed

DMA CHANNEL SELECTION

DMA	JP2	JP3
» 1	Pins 1 & 2 closed	Pins 1 & 2 closed
2	Pins 2 & 3 closed	Pins 2 & 3 closed
3	Pins 3 & 4 closed	Pins 3 & 4 closed

BASE I/O ADDRESS SELECTION

Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
000h	on	on	on	on	on
288h	on	on	off	on	on
2ACh	on	off	off	on	off
» 300h	on	on	on	on	on
338h	on	on	off	off	off

BASE I/O ADDRESS SELECTION (CONT.)

Setting	SW1/6	SW1/7	SW1/8	SW1/9
000h	on	on	on	on
288h	on	off	on	on
2ACh	on	off	on	on
300h	on	on	off	off
338h	on	on	off	off