


# KOUWELL ELECTRONIC CORPORATION

KW-530C

<b>Card Type</b>	Floppy drive controller
<b>Processor</b>	8088/8086, 80286/80386
<b>Processor Speed</b>	Unidentified
<b>Maximum Onboard Memory</b>	Unidentified
<b>Floppy drives supported</b>	360KB, 720KB, 1.2MB, 1.44MB
<b>Data Bus</b>	8-bit ISA

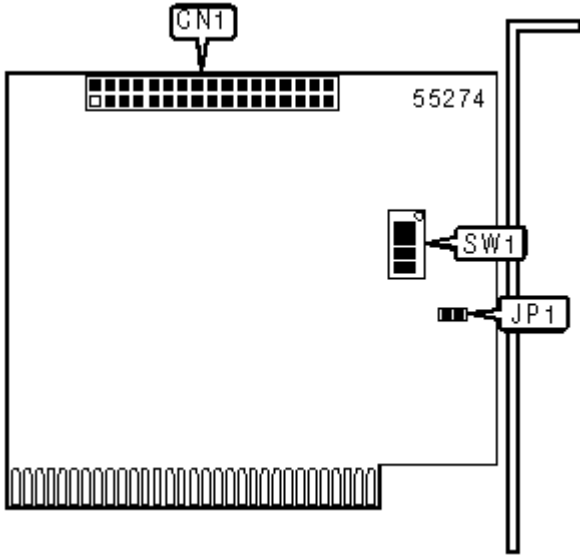

## CONNECTIONS

Function	Location
34-pin floppy drive connector	CN1

## HIGH CAPACITY DRIVE CONTROL SELECTION

Function	Label	Position
» High capacity drive control disabled	JP1	Closed
High capacity drive control enabled	JP1	Open

Note: For 8086/8088 based systems, the above jumper must be shorted regardless of drive capacity.

## USER CONFIGURABLE SETTINGS

Function	Label	Position
Floppy drive C and D in use for 8088/8086 system	SW1/1	On
Floppy drive C and D not in use for 8088/8086 system	SW1/1	Off
Drive B is 360KB or 720KB	SW1/2	On
Drive B is 1.2MB or 1.44MB	SW1/2	Off

Drive A is 360KB or 720KB	SW1/3	On
Drive A is 1.2MB or 1.44MB	SW1/3	Off
Hard drive controller installed	SW1/4	On
Hard drive controller not installed	SW1/4	Off