


PROLINK COMPUTER, INC.

PV-I1740A+

Card Type	Tuner card
Video Chip Set	Intel
Maximum Video Memory	8MB SDRAM
Video Types Supported	VGA
Highest Resolution Supported	1600 x 1200
Data Bus	AGP

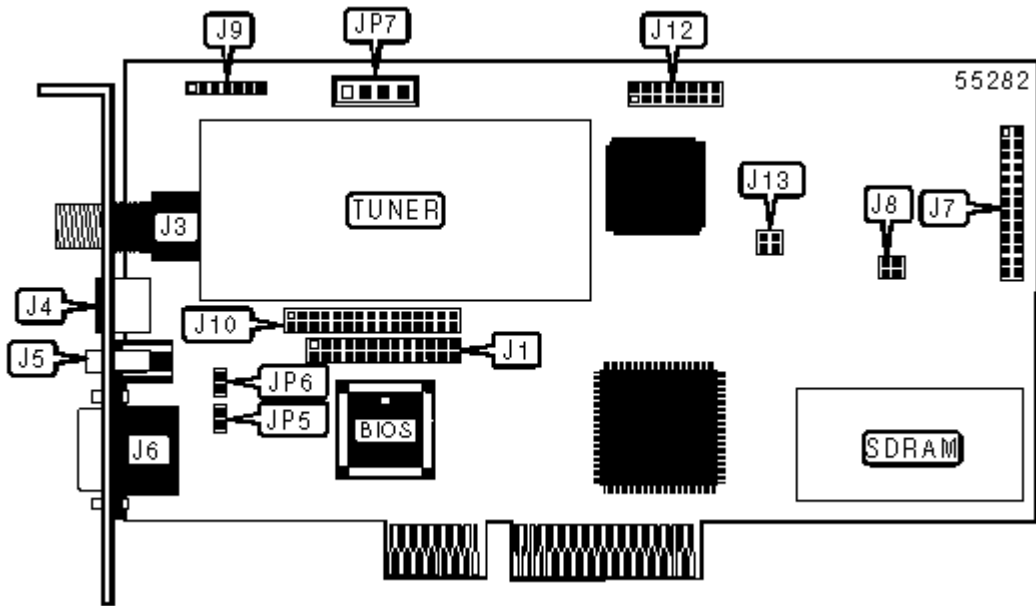


CONNECTIONS

Function	Label	Function	Label
Feature connector (VGA)	J1	MTS/Teletext connector	J8
TV antenna	J3	DTV-camera connector	J9
Audio/video connector	J4	TV out connector	J10
Audio out - external	J5	NICAM/BTSC connector	J12
VGA connector	J6	NICAM/BTSC connector	J13
MTS/Teletext connector	J7	Audio out - internal	JP7

MONITOR COMPATABILITY SELECTION


Function	JP5	JP6
DDC2B disabled	Open	Open
DDC2B enabled	Closed	Closed

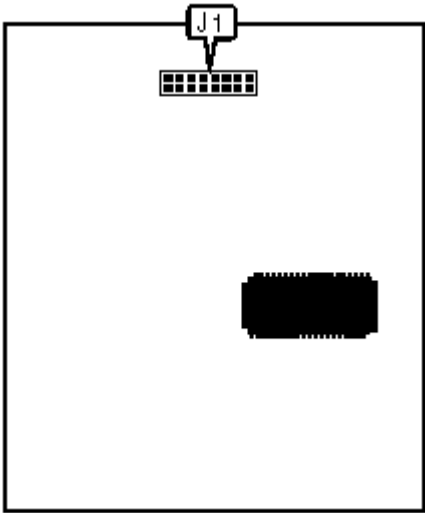

PV-BTSC MODULE

CONNECTIONS	
-------------	--


Function	Label
VGA+ capture connector	J1

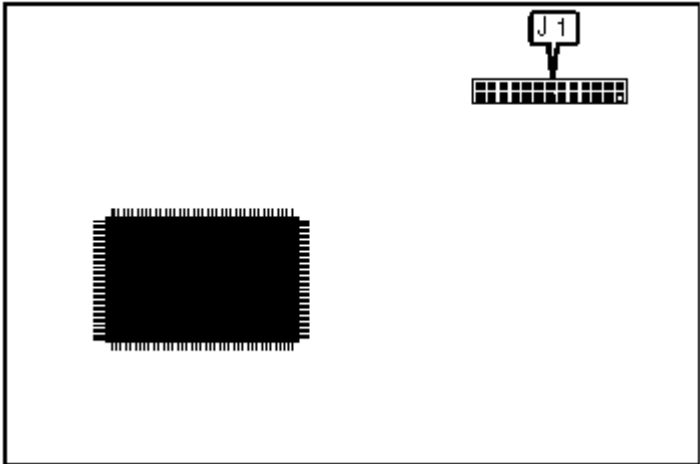

DB-MTSRIC MODULE

CONNECTIONS	
-------------	--


Function	Label
VGA+ capture connector	J1

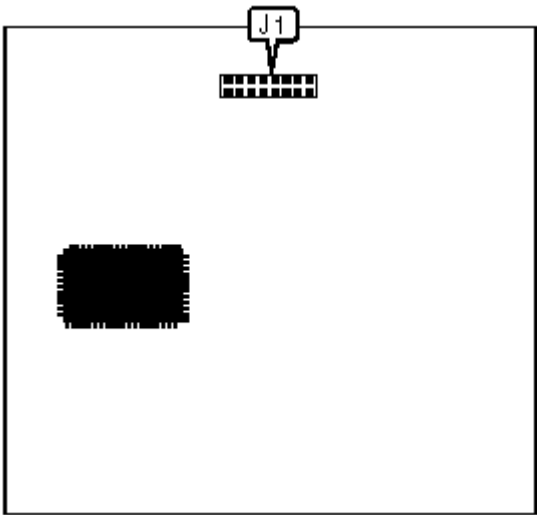

PV-NICAM MODULE

CONNECTIONS

Function	Label
VGA+ capture connector	J1

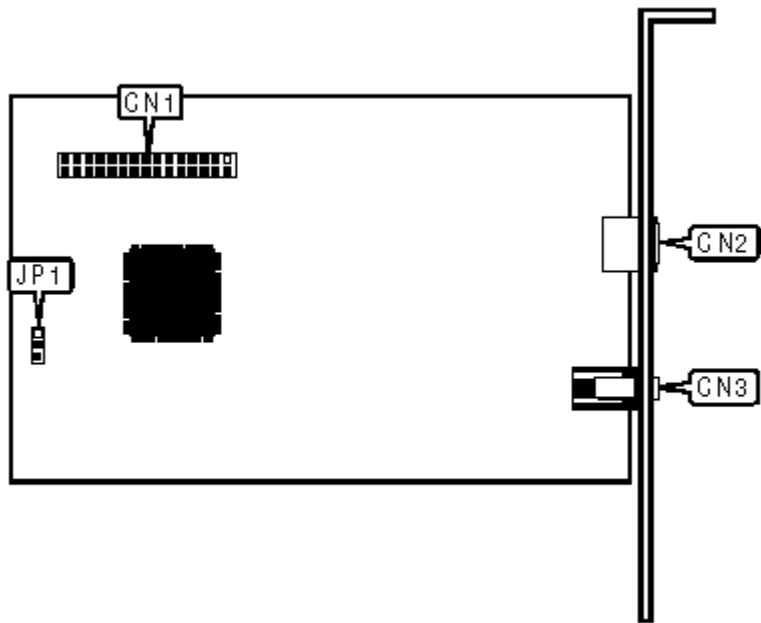

PV-TVOUT MODULE

CONNECTIONS

Function	Label	Function	Label
VGA+ capture connector	CN1	Video out	CN3
S-video out	CN2		

USER CONFIGURABLE SETTINGS

Function	JP1
----------	-----

PAL

Pins 1 & 2 closed

NTSC

Pins 2 & 3 closed