


MT5634ZPW-PCI

|                              |                                                      |
|------------------------------|------------------------------------------------------|
| Card Type                    | Modem                                                |
| Chip Set                     | Unidentified                                         |
| I/O Options                  | Line in, line out, microphone in, speaker out        |
| Maximum Modem Rate           | 56Kbps                                               |
| Maximum Fax Rate             | 14.4Kbps                                             |
| Data Modulation Protocol     | Bell 103/212A                                        |
|                              | ITU-T V.22, V.22bis, V.32ter, V.32bis, V.34, 56Kflex |
| Fax Modulation Protocol      | ITU-T V.17, V.27ter, V.29                            |
| Error Correction/Compression | MNP5, V.42, V.42bis                                  |
| Fax Class                    | Class I                                              |
| Data Bus                     | 32-bit PCI                                           |

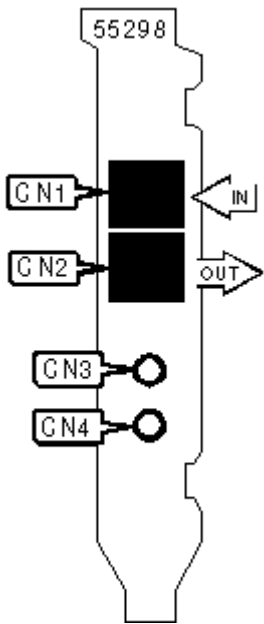

CONNECTIONS

| Function         | Label | Function      | Label |
|------------------|-------|---------------|-------|
| Line in (RJ-11)  | CN1   | Speaker out   | CN3   |
| Line out (RJ-11) | CN2   | Microphone in | CN4   |

SUPPORTED COMMAND SET

Basic AT Commands

AT, ■+++■, A/

A, C, E, F, H, M, Q, V

&C, &F, &G, &V, &Z

Extended AT Commands

## Special Commands

-C

## S Registers

S0, S1, S2, S3, S4, S5, S10, S30

**Note:** See MHI Help File for full command documentation.

## Proprietary AT Command Set

For a full command summary, see MULTI-TECH SYSTEMS, INC. MT5634ZPW, MT3356ZPW, MT3334ZPW