


# CNET TECHNOLOGY, INC.

## C N 2 0 0 E

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Linear Bus
<b>Wiring Type</b>	RG--58A/U 50ohm coaxial AUI transceiver via DB-15 port
<b>Boot ROM</b>	Available

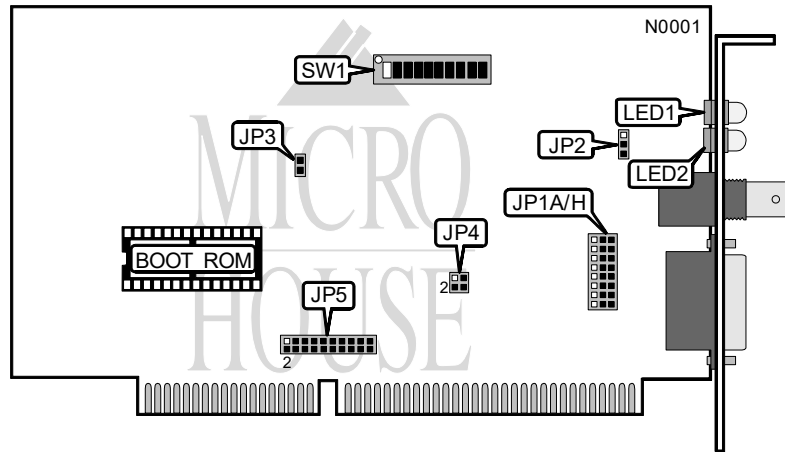

ONBOARD TERMINATOR		
Setting	JP2	JP3
Disabled	Pins 2 & 3 Closed	Open
Enabled	Pins 1 & 2 Closed	Closed

Note: If the card is on either end of a linear bus network segment, the onboard terminator may be used instead of using an external terminator.

CABLE TYPE	
Type	JP1A-H
RG-58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15	Pins 2 & 3 closed

WAIT STATE	
Setting	JP4
0 wait states	Pins 2 & 3 closed
1 wait state	Pins 1 & 2 closed
2 wait states	Pins 3 & 4 closed

Continued on next page . . .

INTERRUPT SELECTION	
IRQ	JP5
2/9	Pins 1 & 2 closed
i3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
14	Pins 17 & 18 closed
15	Pins 19 & 20 closed

I/O BASE ADDRESS				
Address	SW1/1	SW1/2	SW1/3	SW1/4
200 - 21Fh	On	On	On	On
220 - 23Fh	Off	On	On	On
240 - 25Fh	On	Off	On	On
280 - 29Fh	On	On	Off	On
2A0 - 2BFh	Off	On	Off	On
2C0 - 2DFh	On	Off	Off	On
i300 - 31Fh	On	On	On	Off
320 - 33Fh	Off	On	On	Off
340 - 35Fh	On	Off	On	Off

BOOT ROM ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
C0000h	On	On	On	On
C4000h	Off	On	On	On
iC8000h	On	Off	On	On
CC000h	Off	Off	On	On
D0000h	On	On	Off	On
D4000h	Off	On	Off	On
D8000h	On	Off	Off	On
DC000h	Off	Off	Off	On

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	Off	Link not detected
LED1	Red	On	Link detected
LED2	Green	Off	Data is not being transmitted/received
LED2	Green	On	Data is being transmitted/received