


## 3COM CORPORATION

## ETHERLINK II (3C503; ASSY.#2227)

|                      |  |
|----------------------|--|
| <b>NIC Type</b>      | Ethernet   |
| <b>Transfer Rate</b> | 10Mbps   |
| <b>Data Bus</b>      | 8-bit ISA  |
| <b>Topology</b>      | Linear Bus   |
| <b>Wiring Type</b>   | RG-58A/U 50ohm coaxial<br>DIX transceiver via DB-15 port |
| <b>Boot ROM</b>      | Available  |

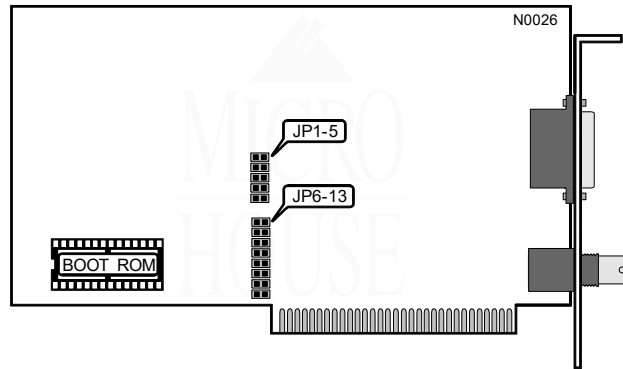

| BOOT ROM ADDRESS SELECTION |        |        |        |        |        |
|----------------------------|--------|--------|--------|--------|--------|
| Address                    | JP1    | JP2    | JP3    | JP4    | JP5    |
| iDisabled                  | Closed | Open   | Open   | Open   | Open   |
| C8000h                     | Open   | Open   | Open   | Open   | Closed |
| CC000h                     | Open   | Open   | Open   | Closed | Open   |
| D8000h                     | Open   | Open   | Closed | Open   | Open   |
| DC000h                     | Open   | Closed | Open   | Open   | Open   |

| I/O BASE ADDRESS SELECTION |        |        |        |        |        |        |        |        |
|----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Address                    | JP6    | JP7    | JP8    | JP9    | JP10   | JP11   | JP12   | JP13   |
| 250h                       | Open   | Open   | Open   | Open   | Closed | Open   | Open   | Open   |
| 280h                       | Open   | Open   | Open   | Open   | Open   | Closed | Open   | Open   |
| 2A0h                       | Open   | Open   | Open   | Open   | Open   | Open   | Closed | Open   |
| 2E0h                       | Open   | Open   | Open   | Open   | Open   | Open   | Open   | Closed |
| 300h                       | Closed | Open   | Open   | Open   | Open   | Open   | Open   | Open   |
| 310h                       | Open   | Closed | Open   | Open   | Open   | Open   | Open   | Open   |
| 330h                       | Open   | Open   | Closed | Open   | Open   | Open   | Open   | Open   |
| 350h                       | Open   | Open   | Open   | Closed | Open   | Open   | Open   | Open   |

| MISCELLANEOUS TECHNICAL NOTES   |
|---|
| The interrupt request and cable type are set using the software that comes with the card. |