


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

STANDARD MICROSYSTEMS CORPORATION

ETHERNET 3008

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

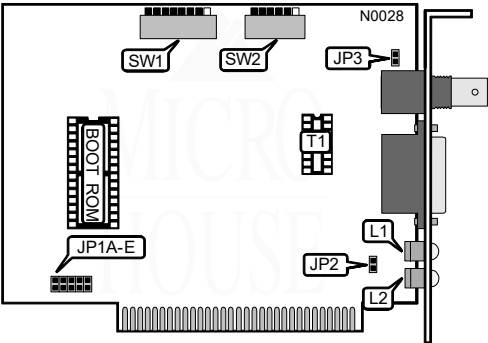

INTERRUPT REQUEST					
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E
2/9	Open	Open	Open	Open	Closed
3	Closed	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open
5	Open	Open	Closed	Open	Open
7	Open	Open	Open	Closed	Open

CABLE TYPE			
Type	JP2	JP3	Pulse Transformer T1
RG-58A/U 50ohm coaxial	Open	Open	Installed
AUI transceiver via DB-15 port	Closed	Open	Not Installed

Continued on next page . . .

STANDARD MICROSYSTEMS CORPORATION

ETHERNET 3008

... continued from previous page

I/O BASE ADDRESS							
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
200h	On	On	On	On	Off	On	On
220h	Off	On	On	On	Off	On	On
240h	On	Off	On	On	Off	On	On
260h	Off	Off	On	On	Off	On	On
280h	On	On	Off	On	Off	On	On
2A0h	Off	On	Off	On	Off	On	On
2C0h	On	Off	Off	On	Off	On	On
2E0h	Off	Off	Off	On	Off	On	On
i300h	On	On	On	Off	Off	On	On
320h	Off	On	On	Off	Off	On	On
340h	On	Off	On	Off	Off	On	On
360h	Off	Off	On	Off	Off	On	On
380h	On	On	Off	Off	Off	On	On
3A0h	Off	On	Off	Off	Off	On	On
3C0h	On	Off	Off	Off	Off	On	On
3E0h	Off	Off	Off	Off	Off	On	On

BOOT ROM	
Setting	SW1/8
iDisabled	Off
Enabled	On

BASE MEMORY ADDRESS						
Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
C0000h	On	On	On	On	Off	Off
C4000h	Off	On	On	On	Off	Off
C8000h	On	Off	On	On	Off	Off
CC000h	Off	Off	On	On	Off	Off
iD0000h	On	On	Off	On	Off	Off
D4000h	Off	On	Off	On	Off	Off
D8000h	On	Off	Off	On	Off	Off
DC000h	Off	Off	Off	On	Off	Off
E0000h	On	On	On	Off	Off	Off
E4000h	Off	On	On	Off	Off	Off
E8000h	On	Off	On	Off	Off	Off
EC000h	Off	Off	On	Off	Off	Off

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Data is being transmitted
LED1	Green	Off	Data is not being transmitted
LED2	Green	On	Data is being received
LED2	Green	Off	Data is not being received