


CNET TECHNOLOGY, INC.  
CN300E/380E

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

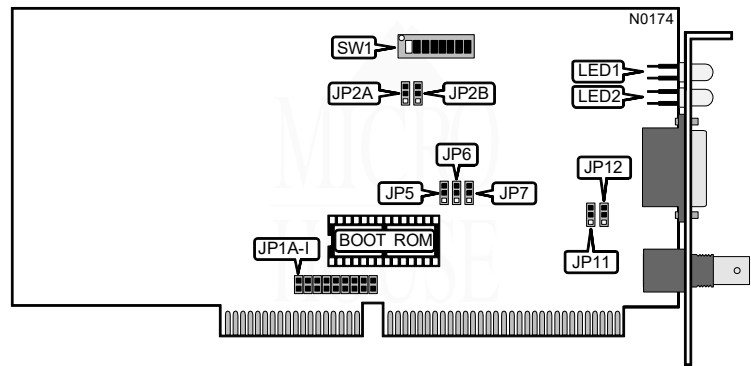

INTERRUPT REQUEST									
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F	JP1G	JP1H	JP1I
2/9	Closed	Open	Open	Open	Open	Open	Open	Open	Open
i3	Open	Closed	Open	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Closed

WAIT STATE		
Setting	JP2A	JP2B
i0 Wait states	Pins 1 & 2 closed	Pins 1 & 2 closed
1 Wait state	Pins 2 & 3 closed	Pins 1 & 2 closed
2 Wait states	Pins 2 & 3 closed	Pins 2 & 3 closed

BOOT ROM	
Setting	JP5
iDisabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

Continued on next page . . .

# CNET TECHNOLOGY, INC.

## CN300E/380E

... continued from previous page

BOOT ROM SIZE		
Size	JP6	JP7
16KB	Pins 1 & 2 Closed	Pins 1 & 2 Closed
32KB	Pins 2 & 3 Closed	Pins 1 & 2 Closed
64KB	Pins 2 & 3 Closed	Pins 2 & 3 Closed

ONBOARD TERMINATOR	
Setting	JP12
Disabled	Pins 1 & 2 Closed
Enabled	Pins 2 & 3 Closed

CABLE TYPE	
Type	JP11
RG-58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed

BOOT ROM ADDRESS					
Address	ROM Size	SW1/1	SW1/2	SW1/3	SW1/4
C0000h	16KB	On	On	On	On
C0000h	32KB	On	On	On	Off
C0000h	64KB	On	On	Off	Off
C4000h	16KB	On	On	On	Off
C8000h	16KB	On	On	Off	On
C8000h	32KB	On	On	Off	Off
CC000h	16KB	On	On	Off	Off
D0000h	16KB	On	Off	On	On
D0000h	32KB	On	Off	On	Off
D0000h	64KB	On	Off	Off	Off
D4000h	16KB	On	Off	On	Off
D8000h	16KB	On	Off	Off	On
D8000h	32KB	On	Off	Off	Off
DC000h	16KB	On	Off	Off	Off

Continued on next page ...

**CNET TECHNOLOGY, INC.**  
**CN300E/380E**

... continued from previous page

I/O BASE ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
200-21Fh	On	On	On	On
220-23Fh	On	On	On	Off
240-25Fh	On	On	Off	On
280-29Fh	On	Off	On	On
2A0-2BFh	On	Off	On	Off
2C0-2DFh	On	Off	Off	On
300-31Fh	Off	On	On	On
320-33Fh	Off	On	On	Off
340-35Fh	Off	On	Off	On

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Data is being received
LED1	Red	Off	Data is not being received
LED2	Green	On	Data is being transmitted
LED2	Green	Off	Data is not being transmitted