


CNET TECHNOLOGY, INC.  
CN190ST

NIC Type	ARCnet
Transfer Rate	2.5Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair RG-62A/U 93ohm coaxial
Boot ROM	Available

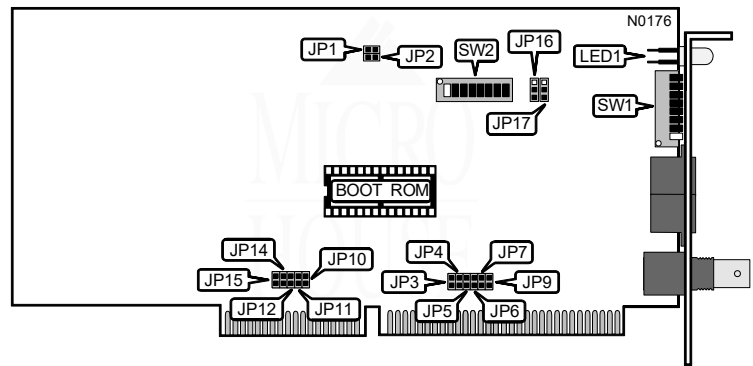

NODE ADDRESS								
Node	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
0	-	-	-	-	-	-	-	-
1	Off	On	On	On	On	On	On	On
2	On	Off	On	On	On	On	On	On
3	Off	Off	On	On	On	On	On	On
4	On	On	Off	On	On	On	On	On
251	Off	Off	On	Off	Off	Off	Off	Off
252	On	On	Off	Off	Off	Off	Off	Off
253	Off	On	Off	Off	Off	Off	Off	Off
254	On	Off	Off	Off	Off	Off	Off	Off
255	Off	Off	Off	Off	Off	Off	Off	Off

Note: Node address 0 is used for messaging between nodes and must not be used.  
A total of 255 node address settings are available. The switches are a binary representation of the decimal node addresses. Switch 1 is the Least Significant Bit and switch 8 is the Most Significant Bit. The switches have the following decimal values: switch 1=1, 2=2, 3=4, 4=8, 5=16, 6=32, 7=64, 8=128. Turn off the switches and add the values of the off switches to obtain the correct node address. (On=0, off=1)

Continued on next page . . .

# CNET TECHNOLOGY, INC.

## C N 1 9 0 S T

... continued from previous page

RESPONSE/RECONFIGURATION TIMEOUTS			
Response Time	Reconfiguration Time	JP1	JP2
74.7 $\mu$ s	840ms	Open	Open
283.4 $\mu$ s	1680ms	Closed	Open
561.8 $\mu$ s	1680ms	Open	Closed
1118.6 $\mu$ s	1680ms	Closed	Closed
Note: All NICs on the network must have this option set the same.			

INTERRUPT REQUEST											
IRQ	JP3	JP4	JP5	JP6	JP7	JP9	JP10	JP11	JP12	JP14	JP15
i3	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
9	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed

CABLE TYPE	
Type	JP16 & JP17
Unshielded twisted pair	Pins 1 & 2 Closed
RG-62A/U 93ohm coaxial	Pins 2 & 3 Closed

I/O BASE ADDRESS				
Address	SW2/1	SW2/2	SW2/3	SW2/4
200h	On	On	On	On
220h	On	On	On	Off
240h	On	On	Off	On
260h	On	On	Off	Off
280h	On	Off	On	On
2A0h	On	Off	On	Off
2C0h	On	Off	Off	On
2E0h	On	Off	Off	Off
300h	Off	On	On	On
320h	Off	On	On	Off
340h	Off	On	Off	On

**THE NETWORK INTERFACE CARD TECHNICAL GUIDE**

360h	Off	On	Off	Off
380h	Off	Off	On	On
3A0h	Off	Off	On	Off
3C0h	Off	Off	Off	On
3E0h	Off	Off	Off	Off

*Continued on next page . . .*

CNET TECHNOLOGY, INC.  
CN190ST

... continued from previous page

BASE MEMORY ADDRESS & BOOT ROM ADDRESS					
Base Address	Boot ROM Address	SW2/5	SW2/6	SW2/7	SW2/8
C0000h	C4000h	Off	On	On	On
C8000h	CC000h	Off	On	On	Off
iD0000h	D4000h	Off	On	Off	On
D8000h	DC000h	Off	On	Off	Off
E0000h	E4000h	Off	Off	On	On

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted or received
LED1	Off	Data is not being transmitted or received