


ACCTON TECHNOLOGY CORPORATION

RINGPAIR-4/16 (TR1605)

NIC Type	Token-Ring
Transfer Rate	4/16Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	Shielded twisted pair
Boot ROM	Available

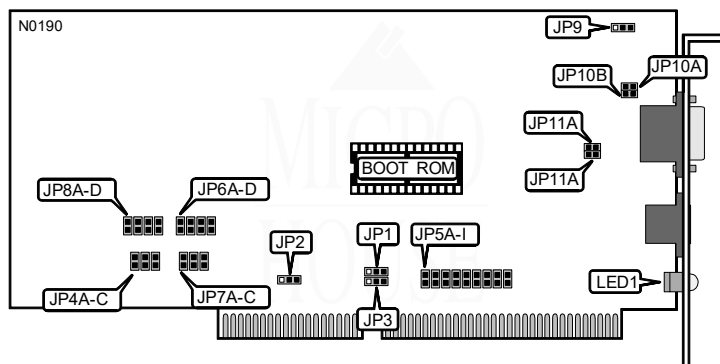

BOOT ROM SIZE		
Size	JP1	JP3
32KB	Pins 2 & 3 Closed	Pins 2 & 3 Closed
64KB	Pins 1 & 2 Closed	Pins 1 & 2 Closed

BOOT ROM	
Setting	JP2
Disabled	Pins 1 & 2 Closed
Enabled	Pins 2 & 3 Closed

DMA CHANNEL						
Channel	JP4A	JP4B	JP4C	JP7A	JP7B	JP7C
iDMA5	Open	Open	Closed	Open	Open	Closed
DMA6	Open	Closed	Open	Open	Closed	Open
DMA7	Closed	Open	Open	Closed	Open	Open
Disabled	Open	Open	Open	Open	Open	Open

Continued next page . . .

ACCTON TECHNOLOGY CORPORATION

RINGPAIR-4/16 (TR1605)

... continued from previous page

INTERRUPT REQUEST									
IRQ	JP5A	JP5B	JP5C	JP5D	JP5E	JP5F	JP5G	JP5H	JP5I
i3	Closed	Open	Open	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open
9	Open	Open	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Open	Open	Open	Closed	Open	Open
11	Open	Open	Open	Open	Open	Open	Open	Closed	Open
12	Open	Open	Open	Open	Open	Open	Open	Open	Closed

COMPATIBILITY MODE				
Option	JP6A	JP6B	JP6C	JP6D
iSelect 0	Closed	Open	Open	Open
Select 1	Open	Closed	Open	Open
Select 2	Open	Open	Closed	Open
Select 3	Open	Open	Open	Closed

Note: If the card fails to run after eliminating all other possible problems, use one of the optional settings.

I/O BASE ADDRESS AND BOOT ROM ADDRESS						
I/O Address	32KB ROM Address	64KB ROM Address	JP8A	JP8B	JP8C	JP8D
i0A20-0A31h	C0000h-CFFFFh	C0000h-C7FFFh	Closed	Open	Open	Open
1A20-1A31h	D0000h-DFFFFh	C8000h-CFFFFh	Open	Closed	Open	Open
2A20-2A31h	N/A	D0000h-D7FFFh	Open	Open	Closed	Open
3A20-3A31h	N/A	D8000h-DFFFFh	Open	Open	Open	Closed

NETWORK SPEED	
Speed	JP9
i16Mbps	Pins 2 & 3 Closed
4Mbps	Pins 1 & 2 Closed

CABLE TYPE		
Type	JP10A & JP10B	JP11A & JP11B
iShielded twisted pair	Open	Open
Unshielded twisted pair	Closed	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Link is correctly configured and running at 16Mbps
LED1	Red	On	Link is correctly configured and running at 4Mbps