


# CABLETRON SYSTEMS, INC.

## E1030/-X, E1040/-X (Fiber Optic)

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Star
	Linear Bus
<b>Wiring Type</b>	200 $\mu$ fiber optic cable
	AUI transceiver via DB-15 port
<b>Boot ROM</b>	Not Available

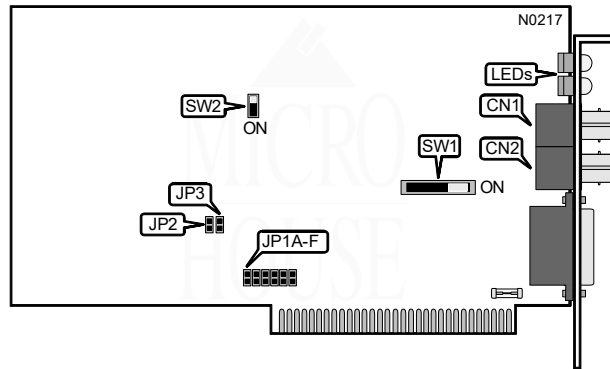

CONNECTIONS	
Purpose	Location
SMA 905 Receive Connector (gray)	CN1
SMA 905 Transmit Connector (black)	CN2

INTERRUPT REQUEST						
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F
2/9	Open	Open	Open	Open	Open	Closed
13	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open

I/O BASE ADDRESS		
Address	JP2	JP3
i220h	Closed	Closed
280h	Closed	Open
300h	Open	Closed
380h	Open	Open

Continued on next page . . .

## CABLETRON SYSTEMS, INC.


## E1030/-X, E1040/-X (Fiber Optic)

... continued from previous page

CABLE TYPE	
Type	SW1
i200μ fiber optic cable	On
AUI transceiver via DB-15 port	Off

SIGNAL QUALITY ERROR (SQE) TEST	
Setting	SW2
iDisabled	Off
Enabled	On

Note: Signal Quality Error (SQE) is a test of the collision circuitry and path.



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On/Blinking	Data is being transmitted
1	Green	Off	Data is not being transmitted
2	Red	On/Blinking	Collision detected on network
2	Red	Off	Normal operation
3	Yellow	On/Blinking	Data is being received
3	Yellow	Off	Data is not being received
4	Green	On	Fiber optic network connection is good
4	Green	Off	Fiber optic network connection is broken