


PURE DATA LTD.
PD1516PLUS-F (FIBER OPTIC)

NIC Type	ARCnet
Transfer Rate	2.5Mbps
Data Bus	16-bit ISA
Topology	Star
	Linear Bus
Wiring Type	50/62.5/100 μ Fiber optic cable
Boot ROM	Available

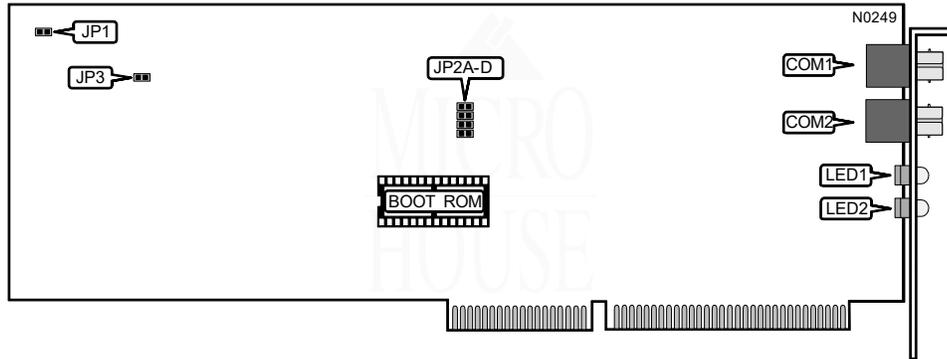

CONFIGURATION MEMORY CLEAR	
Clear	JP1
iNormal operation	Open
Clear all addresses and settings from memory	Closed

CARDS INSTALLED				
Card number	JP2A	JP2B	JP2C	JP2D
1	Closed	Open	Open	Open
2	Open	Closed	Open	Open
3	Open	Open	Closed	Open
4	Open	Open	Open	Closed

Note: If there is only one NIC installed in a system, set this option to the "1" position. If this NIC is the second NIC to be installed in a system, set this option to the "2" position and so on.

COMPATIBILITY MODE	
Condition	JP3
iCompatibility mode disabled	Open
Compatibility mode enabled	Closed

Note: Compatibility mode should be enabled only when the NIC is installed in a system using a Suntac 286 chipset.

Continued on next page . . .

PURE DATA LTD.
 PD1516PLUS-F (FIBER OPTIC)

... continued from previous page

CONNECTORS	
Connectors	Definition
COM2 connector	Transmit
COM1 connector	Receive

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	Blinking	I/O bus activity
LED1	Red	Off	No I/O bus activity
LED2	Green	On	Data is being transmitted or received
LED2	Green	Blinking	No network activity detected, or bad connection