


PURE DATA LTD.
PDI508PLUS-H

NIC Type ARCnet
Transfer Rate 2.5Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG-62A/U 93ohm coaxial
Boot ROM Available

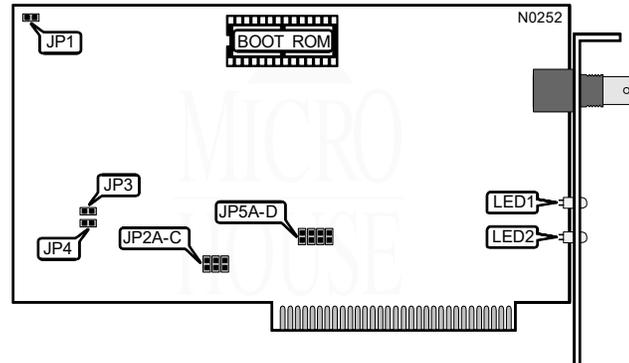

CONFIGURATION MEMORY	
Setting	JP1
Configuration memory normal operation	Open
Configuration memory clear (reset card parameters)	Closed

INTERRUPT REQUEST			
IRQ	JP2A	JP2B	JP2C
5	Closed	Open	Open
6	Open	Closed	Open
7	Open	Open	Closed

TIMEOUT CONFIGURATION			
Response Time	Reconfiguration Time	JP3	JP4
174.7 μ s	840 μ s	Open	Open
283.4 μ s	1680 μ s	Open	Closed
561.8 μ s	1680 μ s	Closed	Open
1118.6 μ s	1680 μ s	Closed	Closed

Continued on next page . . .

PURE DATA LTD.
PDI508PLUS-H

... continued from previous page

CARDS INSTALLED				
Card number	JP5A	JP5B	JP5C	JP5D
1	Open	Open	Open	Closed
2	Open	Open	Closed	Open
3	Open	Closed	Open	Open
4	Closed	Open	Open	Open

Note: If there is only one NIC installed in a system, set this option to the "1" position. If this NIC is the second card to be installed in the system, set this option to the "2" position, and so on.

DIAGNOSTIC LED(S)		
Color	Status	Condition
Red	On/Blinking	I/O bus activity detected
Red	Off	No I/O bus activity detected
Green	On	Network activity detected
Green	Off	No network activity detected

MISCELLANEOUS NOTES
Software that is supplied with the card must be run in order to fully configure the card.