


PURE DATA LTD.  
PDI9025-4/16

**NIC Type** Token-Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit ISA  
**Topology** Ring  
**Wiring Type** Shielded/Unshielded twisted pair  
**Boot ROM** Available

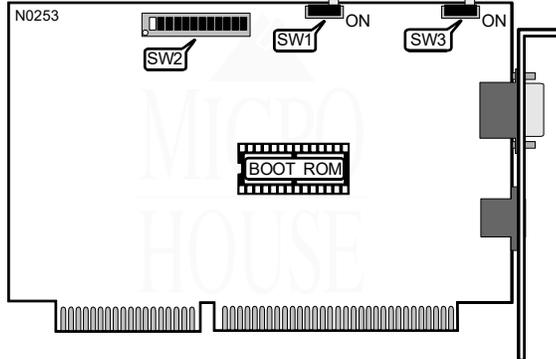

NETWORK SPEED	
Speed	SW1
i16Mbps	Off
4Mbps	On

BOOT ROM	
Setting	SW2/1
iDisabled	On
Enabled	Off

DMA CHANNEL		
Channel	SW2/11	SW2/12
iDMA5	On	On
DMA6	On	Off
DMA7	Off	On
Programmed I/O	Off	Off

Note: If you do not wish to use the DMA for memory transfers, you can select programmed I/O. In an XT-class machine, programmed I/O mode is automatically used no mater the configuration.

I/O BASE ADDRESS		
Address	SW2/9	SW2/10
iA20-A23h, A30-A3Fh	Off	Off
A24-A27h, A40-A4Fh	On	Off
A50-A53h, A60-A6Fh	Off	On
A54-A57h, A70-A7Fh	On	On

Continued on next page . . .

... continued from previous page

BOOT ROM ADDRESS					
Address	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
C000h	On	On	On	On	On
C200h	On	On	On	On	Off
C400h	On	On	On	Off	On
C600h	On	On	On	Off	Off
C800h	On	On	Off	On	On
CA00h	On	On	Off	On	Off
CC00h	On	On	Off	Off	On
CE00h	On	On	Off	Off	Off
D000h	On	Off	On	On	On
D200h	On	Off	On	On	Off
D400h	On	Off	On	Off	On
D600h	On	Off	On	Off	Off
D800h	On	Off	Off	On	On
DA00h	On	Off	Off	On	Off
DC00h	On	Off	Off	Off	On
DE00h	On	Off	Off	Off	Off
E000h	Off	On	On	On	On
E200h	Off	On	On	On	Off
E400h	Off	On	On	Off	On
E600h	Off	On	On	Off	Off
E800h	Off	On	Off	On	On
EA00h	Off	On	Off	On	Off
EC00h	Off	On	Off	Off	On
EE00h	Off	On	Off	Off	Off
F000h	Off	Off	On	On	On
F200h	Off	Off	On	On	Off
F400h	Off	Off	On	Off	On
F600h	Off	Off	On	Off	Off
F800h	Off	Off	Off	On	On
FA00h	Off	Off	Off	On	Off
FC00h	Off	Off	Off	Off	On
FE00h	Off	Off	Off	Off	Off

INTERRUPT REQUEST		
IRQ	SW2/7	SW2/8
i2/9	On	On
3	On	Off
10	Off	On
11	Off	Off

Continued on next page ...

PURE DATA LTD.  
PDI9025-4/16

... continued from previous page

CABLE TYPE	
Type	SW3
iShielded Twisted Pair	Off
Shielded/Unshielded twisted pair	On