


DIAMOND FLOWER, INC.

NET-400

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type RG--58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

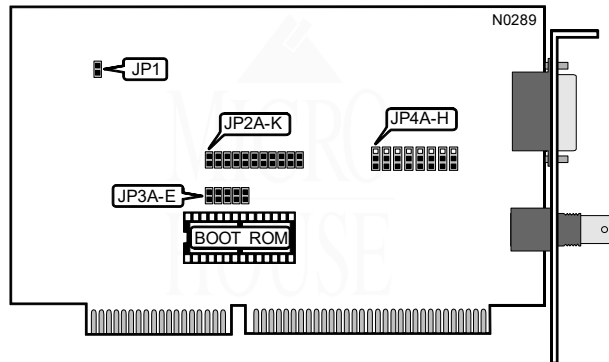

DATA I/O TRANSFER MODE	
Mode	JP1
iNormal	Open
Enhanced	Closed

Note: Enhanced mode can speed data transfer speeds by up to 20%.

CABLE TYPE	
Type	JP4A-4H
iRG--58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed

INTERRUPT REQUEST				
IRQ	JP2A	JP2B	JP2C	JP2D
2	Open	Open	Open	Closed
3	Open	Open	Closed	Open
4	Open	Closed	Open	Open
5	Closed	Open	Open	Open

I/O BASE ADDRESS		
Address	JP2I	JP2J
i300h	Closed	Closed
320h	Open	Closed
340h	Closed	Open
360h	Open	Open

Continued on next page . . .

DIAMOND FLOWER, INC.
NET - 400

... continued from previous page

BOOT ROM	
Setting	JP2K
Disabled	Open
Enabled	Closed

BASE MEMORY ADDRESS					
Address	JP3A	JP3B	JP3C	JP3D	JP3E
C0000h	Closed	Closed	Closed	Closed	Closed
C2000h	Open	Closed	Closed	Closed	Closed
C4000h	Closed	Open	Closed	Closed	Closed
C6000h	Open	Open	Closed	Closed	Closed
C8000h	Closed	Closed	Open	Closed	Closed
CA000h	Open	Closed	Open	Closed	Closed
CC000h	Closed	Open	Open	Closed	Closed
CE000h	Open	Open	Open	Closed	Closed
D0000h	Closed	Closed	Closed	Open	Closed
D2000h	Open	Closed	Closed	Open	Closed
D4000h	Closed	Open	Closed	Open	Closed
D6000h	Open	Open	Closed	Open	Closed
D8000h	Closed	Closed	Open	Open	Closed
DA000h	Open	Closed	Open	Open	Closed
DC000h	Closed	Open	Open	Open	Closed
DE000h	Open	Open	Open	Open	Closed
E0000h	Closed	Closed	Closed	Closed	Open
E2000h	Open	Closed	Closed	Closed	Open
E4000h	Closed	Open	Closed	Closed	Open
E6000h	Open	Open	Closed	Closed	Open
E8000h	Closed	Closed	Open	Closed	Open
EA000h	Open	Closed	Open	Closed	Open
EC000h	Closed	Open	Open	Closed	Open
EE000h	Open	Open	Open	Closed	Open
F0000h	Closed	Closed	Closed	Open	Open
F2000h	Open	Closed	Closed	Open	Open

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP2E-JP2H	Open