


DIAMOND FLOWER, INC.
NET-400EC

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG--58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

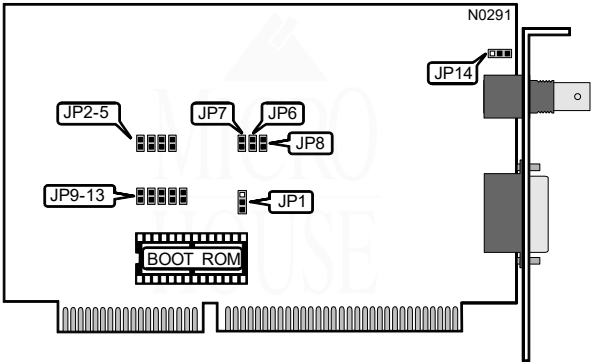

I/O CHRDY MODE	
Mode	JP1
iNormal (no ESDI HD controller installed)	Pins 1 & 2 Closed
ESDI (ESDI HD controller installed)	Pins 2 & 3 Closed

INTERRUPT REQUEST				
IRQ	JP2	JP3	JP4	JP5
2	Open	Open	Open	Closed
i3	Open	Open	Closed	Open
4	Open	Closed	Open	Open
5	Closed	Open	Open	Open

I/O BASE ADDRESS		
Address	JP6	JP7
i300h	Closed	Closed
320h	Closed	Open
340h	Open	Closed
360h	Open	Open

BOOT ROM	
Setting	JP8
iDisabled	Open
Enabled	Closed

Continued on next page . . .

DIAMOND FLOWER, INC.
NET-400EC

... continued from previous page

BOOT ROM ADDRESS					
Address	JP9	JP10	JP11	JP12	JP13
C0000h	Closed	Closed	Closed	Closed	Closed
C2000h	Open	Closed	Closed	Closed	Closed
C4000h	Closed	Open	Closed	Closed	Closed
C6000h	Open	Open	Closed	Closed	Closed
C8000h	Closed	Closed	Open	Closed	Closed
CA000h	Open	Closed	Open	Closed	Closed
CC000h	Closed	Open	Open	Closed	Closed
CE000h	Open	Open	Open	Closed	Closed
D0000h	Closed	Closed	Closed	Open	Closed
D2000h	Open	Closed	Closed	Open	Closed
D4000h	Closed	Open	Closed	Open	Closed
D6000h	Open	Open	Closed	Open	Closed
D8000h	Closed	Closed	Open	Open	Closed
DA000h	Open	Closed	Open	Open	Closed
iDC000h	Closed	Open	Open	Open	Closed
DE000h	Open	Open	Open	Open	Closed
E0000h	Closed	Closed	Closed	Closed	Open
E2000h	Open	Closed	Closed	Closed	Open
E4000h	Closed	Open	Closed	Closed	Open
E6000h	Open	Open	Closed	Closed	Open
E8000h	Closed	Closed	Open	Closed	Open
EA000h	Open	Closed	Open	Closed	Open
EC000h	Closed	Open	Open	Closed	Open
EE000h	Open	Open	Open	Closed	Open
F0000h	Closed	Closed	Closed	Open	Open
F2000h	Open	Closed	Closed	Open	Open

CABLE TYPE	
Type	JP14
iRG--58A/U 50ohm coaxial	Pins 1 & 2 Closed
AUI transceiver via DB-15 port	Pins 2 & 3 Closed