


DIAMOND FLOWER, INC.

NET-400ET

| | |
|----------------------|--------------------------------|
| NIC Type | Ethernet |
| Transfer Rate | 10Mbps |
| Data Bus | 16-bit ISA |
| Topology | Star |
| Wiring Type | Unshielded twisted pair |
| | AUI transceiver via DB-15 port |
| Boot ROM | Available |

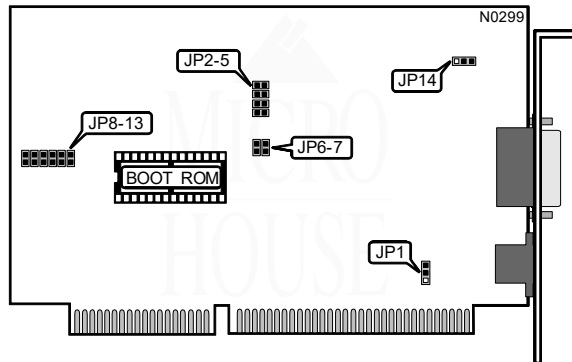

| I/O CHRDY MODE | |
|---|-------------------|
| Mode | JP1 |
| iNormal (no ESDI HD controller installed) | Pins 1 & 2 Closed |
| ESDI (ESDI HD controller installed) | Pins 2 & 3 Closed |

| INTERRUPT REQUEST | | | | |
|-------------------|--------|--------|--------|--------|
| IRQ | JP2 | JP3 | JP4 | JP5 |
| 2 | Closed | Open | Open | Open |
| 3 | Open | Closed | Open | Open |
| 4 | Open | Open | Closed | Open |
| 5 | Open | Open | Open | Closed |

| I/O BASE ADDRESS | | |
|------------------|--------|--------|
| Address | JP6 | JP7 |
| i300h | Closed | Closed |
| 320h | Closed | Open |
| 340h | Open | Closed |
| 360h | Open | Open |

| BOOT ROM | |
|-----------|--------|
| Setting | JP8 |
| iDisabled | Open |
| Enabled | Closed |

Continued on next page . . .

DIAMOND FLOWER, INC.
NET-400ET

... continued from previous page

| BOOT ROM ADDRESS | | | | | |
|------------------|--------|--------|--------|--------|--------|
| Address | JP9 | JP10 | JP11 | JP12 | JP13 |
| C0000h | Closed | Closed | Closed | Closed | Closed |
| C2000h | Open | Closed | Closed | Closed | Closed |
| C4000h | Closed | Open | Closed | Closed | Closed |
| C6000h | Open | Open | Closed | Closed | Closed |
| C8000h | Closed | Closed | Open | Closed | Closed |
| CA000h | Open | Closed | Open | Closed | Closed |
| CC000h | Closed | Open | Open | Closed | Closed |
| CE000h | Open | Open | Open | Closed | Closed |
| D0000h | Closed | Closed | Closed | Open | Closed |
| D2000h | Open | Closed | Closed | Open | Closed |
| D4000h | Closed | Open | Closed | Open | Closed |
| D6000h | Open | Open | Closed | Open | Closed |
| D8000h | Closed | Closed | Open | Open | Closed |
| DA000h | Open | Closed | Open | Open | Closed |
| iDC000h | Closed | Open | Open | Open | Closed |
| DE000h | Open | Open | Open | Open | Closed |
| E0000h | Closed | Closed | Closed | Closed | Open |
| E2000h | Open | Closed | Closed | Closed | Open |
| E4000h | Closed | Open | Closed | Closed | Open |
| E6000h | Open | Open | Closed | Closed | Open |
| E8000h | Closed | Closed | Open | Closed | Open |
| EA000h | Open | Closed | Open | Closed | Open |
| EC000h | Closed | Open | Open | Closed | Open |
| EE000h | Open | Open | Open | Closed | Open |
| F0000h | Closed | Closed | Closed | Open | Open |
| F2000h | Open | Closed | Closed | Open | Open |

| CABLE TYPE | |
|-----------------------------------|-------------------|
| Type | JP14 |
| iShielded/Unshielded twisted pair | Pins 2 & 3 closed |
| AUI transceiver via DB-15 port | Pins 1 & 2 closed |