


# COMPEX, INC. TNET16

<b>NIC Type</b>	Token-Ring
<b>Transfer Rate</b>	4/16Mbps
<b>Data Bus</b>	8/16-bit ISA
<b>Topology</b>	Ring
<b>Wiring Type</b>	Shielded twisted pair
<b>Boot ROM</b>	Available (Also contains a built in RPL feature)

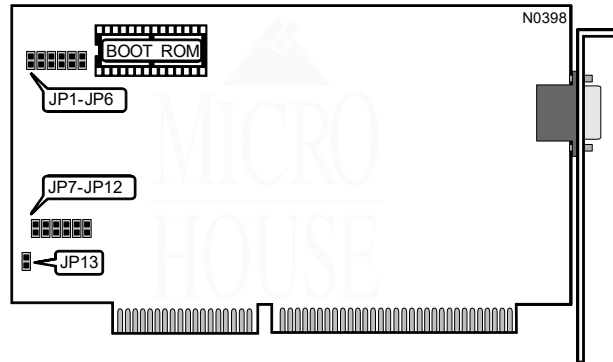

BASE MEMORY ADDRESS						
Address	JP1	JP2	JP3	JP4	JP5	JP6
C0000 - C1FFFh	Closed	Open	Open	Open	Open	Open
C2000 - C3FFFh	Closed	Open	Open	Open	Open	Closed
C4000 - C5FFFh	Closed	Open	Open	Open	Closed	Open
C6000 - C7FFFh	Closed	Open	Open	Open	Closed	Closed
C8000 - C9FFFh	Closed	Open	Open	Closed	Open	Open
CA000 - CBFFFh	Closed	Open	Open	Closed	Open	Closed
CC000 - CDFFFh	Closed	Open	Open	Closed	Closed	Open
CE000 - CFFFFh	Closed	Open	Open	Closed	Closed	Closed
D0000 - D1FFFh	Closed	Open	Closed	Open	Open	Open
D2000 - D3FFFh	Closed	Open	Closed	Open	Open	Closed
D4000 - D5FFFh	Closed	Open	Closed	Open	Closed	Open
D6000 - D7FFFh	Closed	Open	Closed	Open	Closed	Closed
D8000 - D9FFFh	Closed	Open	Closed	Closed	Open	Open
DA000 - DBFFFh	Closed	Open	Closed	Closed	Open	Closed
DC000 - DDFFFh	Closed	Open	Closed	Closed	Closed	Open
DE000 - DFFFFh	Closed	Open	Closed	Closed	Closed	Closed

Note: If a second card is to be installed in the same system, the second card should use address DC000 as its default. A maximum of two cards can be installed in a single system.

Continued on next page . . .

INTERRUPT REQUEST		
IRQ	JP7	JP8
i2/9	Open	Open
3	Open	Closed
6	Closed	Open
7	Closed	Closed

SHARED RAM SIZE		
Size	JP9	JP10
8KB	Open	Open
i16KB	Open	Closed
32KB	Closed	Open
64KB	Closed	Closed

Note: RAM-Paging is only available with the 16KB setting.

NETWORK SEGMENT SPEED	
Speed	JP11
i16Mbps	Closed
4Mbps	Open

Note: All cards on the network segment must have this option set identically.

PRIMARY/ALTERNATE SELECT AND I/O BASE ADDRESS		
Setting	I/O Address	JP12
iPrimary	A26 - A23h	Open
Alternate	A24 - A27h	Closed

Note: If two cards are to be used in a single system, one of the cards must be set to primary and the other one must be set to alternate.

BOOT ROM	
Setting	JP13
iBoot ROM disabled/Onboard RPL enabled	Open
Boot ROM enabled/Onboard RPL disabled	Closed

Note: If you wish to use a boot ROM instead of the built-in RPL(Remote Program Load) JP13 should be set to closed.