


OLICOM, INC.

ISA 16/4 ADAPTER

NIC Type	Token-Ring
Transfer Rate	4/16Mbps
Data Bus	8/16-bit ISA
Topology	Ring
Wiring Type	Unshielded twisted pair (RJ-45 port) Shielded twisted pair (DB-9 port)
Boot ROM	Available

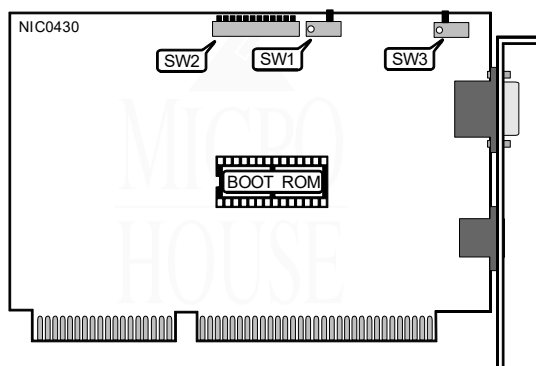

NETWORK SEGMENT SPEED		
Setting		SW1
i4Mbps	Off	
16Mbps	On	
Note: All cards on the network segment must have this option set the same.		

BOOT ROM		
Setting		SW2/1
iDisabled	On	
Enabled	Off	

I/O BASE ADDRESS		
Address	SW2/9	SW2/10
iA20-A23h , A30-A3Fh	Off	Off
A24-A27h , A40-A4Fh	On	Off
A50-A53h , A60-A6Fh	Off	On
A54-A57h , A70-A7Fh	On	On

Continued on next page . . .

OLICOM, INC.

ISA 16/4 ADAPTER

... continued from previous page

DMA CHANNEL		
Channel	SW2/11	SW2/12
iDMA5	On	On
DMA6	On	Off
DMA7	Off	On
Programmed I/O	Off	Off

Note: If the card is installed into an 8-bit slot, programmed I/O is automatically selected regardless of the switch settings.

BOOT ROM ADDRESS					
Address	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
C0000 - C1FFFh	On	On	On	On	On
C2000 - C3FFFh	On	On	On	On	Off
C4000 - C5FFFh	On	On	On	Off	On
C6000 - C7FFFh	On	On	On	Off	Off
C8000 - C9FFFh	On	On	Off	On	On
CA000 - CBFFFh	On	On	Off	On	Off
CC000 - CDFFFh	On	On	Off	Off	On
CE000 - CFFFFh	On	On	Off	Off	Off
D0000 - D1FFFh	On	Off	On	On	On
D2000 - D3FFFh	On	Off	On	On	Off
D4000 - D5FFFh	On	Off	On	Off	On
D6000 - D7FFFh	On	Off	On	Off	Off
D8000 - D9FFFh	On	Off	Off	On	On
DA000 - DBFFFh	On	Off	Off	On	Off
DC000 - DDFFFh	On	Off	Off	Off	On
DE000 - DFFFFh	On	Off	Off	Off	Off
E0000 - E1FFFh	Off	On	On	On	On
E2000 - E3FFFh	Off	On	On	On	Off
E4000 - E5FFFh	Off	On	On	Off	On
E6000 - E7FFFh	Off	On	On	Off	Off

Chapter 5: Jumper Settings

E8000 - E9FFFh	Off	On	Off	On	On
EA000 - EBFFFh	Off	On	Off	On	Off
EC000 - EDFFFh	Off	On	Off	Off	On
EE000 - EFFFFh	Off	On	Off	Off	Off
F0000 - F1FFFh	Off	Off	On	On	On
F2000 - F3FFFh	Off	Off	On	On	Off
F4000 - F5FFFh	Off	Off	On	Off	On
F6000 - F7FFFh	Off	Off	On	Off	Off
F8000 - F9FFFh	Off	Off	Off	On	On
FA000 - FBFFFh	Off	Off	Off	On	Off
FC000 - FDFFFh	Off	Off	Off	Off	On
FE000 - FFFFFh	Off	Off	Off	Off	Off

Continued on next page . . .

OLICOM, INC.

ISA 16/4 ADAPTER

... continued from previous page

INTERRUPT REQUEST		
IRQ	SW2/7	SW2/8
i2/9	Off	Off
3	On	Off
10	Off	On
11	On	On

CABLE TYPE	
Type	SW3
iShielded twisted pair (DB-9 port)	On
Unshielded twisted pair (RJ-45 port)	Off