


EDIMAX COMPUTER COMPANY

2000C/EN-3360 V2.4

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

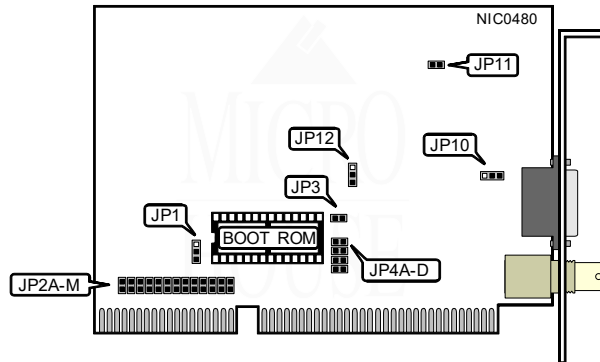

COMPATIBILITY MODE	
Setting	JP1
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

Note: On some systems the data bus timing is not truly IBM PC/AT compatible. If the card is not initializing, enabling compatibility mode may allow the card to operate properly.

INTERRUPT SETTINGS											
IRQ	JP2A	JP2B	JP2C	JP2D	JP2E	JP2F	JP2G	JP2H	JP2I	JP2J	JP2K
2/9	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
3	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
6	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
7	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
11	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
12	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open

Chapter 5: Jumper Settings

14	Open	Close d	Open	Open	Open	Open	Open	Open	Open	Open	Open
15	Close d	Open	Open	Open	Open	Open	Open	Open	Open	Open	Open

Continued on next page . . .

I/O BASE ADDRESS		
Address	JP2L	JP2M
i300h	Closed	Closed
320h	Closed	Open
340h	Open	Closed
360h	Open	Open

BOOT ROM	
Setting	JP3
iDisabled	Open
Enabled	Closed

BOOT ROM ADDRESS				
Address	JP4A	JP4B	JP4C	JP4D
C0000h	Closed	Closed	Closed	Closed
C4000h	Closed	Closed	Closed	Open
iC8000h	Closed	Closed	Open	Closed
CC000h	Closed	Closed	Open	Open
D0000h	Closed	Open	Closed	Closed
D4000h	Closed	Open	Closed	Open
D8000h	Closed	Open	Open	Closed
DC000h	Closed	Open	Open	Open

CABLE TYPE		
Type	JP10	JP12
iRG-58A/U 50ohm coaxial	Pins 2 & 3 Closed	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed	Pins 1 & 2 Closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP6	Unused

CONNECTORS	
Setting	Location
External power LED.	JP11