


3COM CORPORATION

ETHERLINK II/16 TP (3C503-TP)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8/16-bit ISA
Topology	Linear Bus
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available

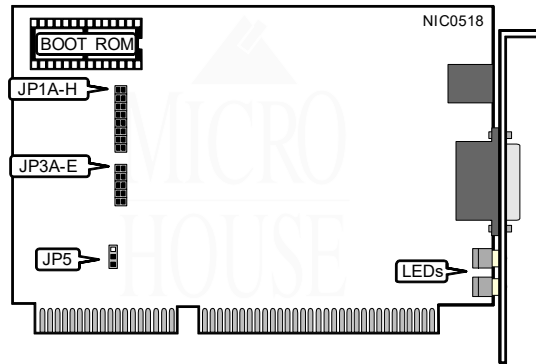

I/O BASE ADDRESS								
Address	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F	JP1G	JP1H
250h	Open	Open	Open	Open	Closed	Open	Open	Open
280h	Open	Open	Open	Open	Open	Closed	Open	Open
2A0h	Open	Open	Open	Open	Open	Open	Closed	Open
2E0h	Open	Open	Open	Open	Open	Open	Open	Closed
i300h	Closed	Open	Open	Open	Open	Open	Open	Open
310h	Open	Closed	Open	Open	Open	Open	Open	Open
330h	Open	Open	Closed	Open	Open	Open	Open	Open
350h	Open	Open	Open	Closed	Open	Open	Open	Open

BOOT ROM ADDRESS					
Address	JP3A	JP3B	JP3C	JP3D	JP3E
iDisabled	Closed	Open	Open	Open	Open
C8000h	Open	Closed	Open	Open	Open
CC000h	Open	Open	Closed	Open	Open
D8000h	Open	Open	Open	Closed	Open
DC000h	Open	Open	Open	Open	Closed

Continued on next page . . .

**3COM CORPORATION
ETHERLINK II/16 TP (3C503-TP)**

... continued from previous page

DATA BUS SIZE	
Setting	JP5
16-bit	Pins 2 & 3 closed
8-bit	Pins 1 & 2 closed

DIAGNOSTIC LED(S)		
Color	Status	Condition
Yellow	On	Data is being transmitted or received
Yellow	Off	Data is not being transmitted or received
Green	On	Twisted pair network connection is good
Green	Off	Twisted pair network connection is broken