


3COM CORPORATION  
TOKEN LINK

NIC Type	Token-Ring
Transfer Rate	4Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	Unshielded twisted pair Shielded twisted pair (DB-9 port)
Boot ROM	Available

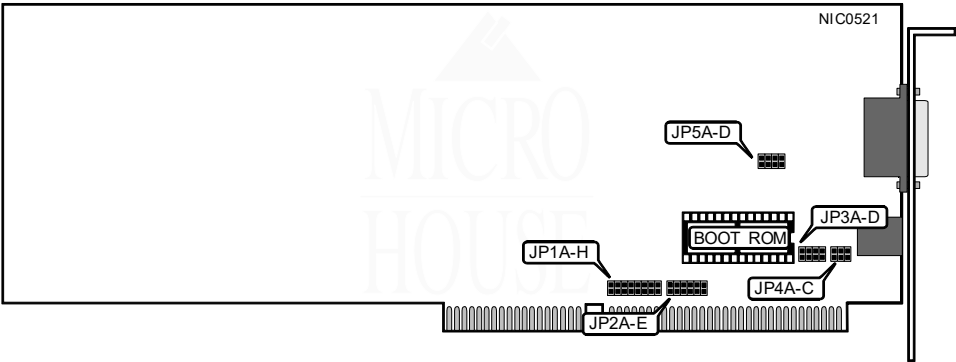

DMA CHANNEL								
Channel	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F	JP1G	JP1H
iDMA3	Open	Open	Open	Open	Open	Open	Closed	Closed
DMA5	Open	Open	Open	Open	Closed	Closed	Open	Open
DMA6	Open	Open	Closed	Closed	Open	Open	Open	Open
DMA7	Closed	Closed	Open	Open	Open	Open	Open	Open

INTERRUPT REQUEST						
IRQ	JP2A	JP2B	JP2C	JP2D	JP2E	JP2F
i5	Open	Open	Open	Open	Open	Closed
10	Open	Open	Open	Open	Closed	Open
11	Open	Open	Open	Closed	Open	Open
12	Open	Open	Closed	Open	Open	Open
14	Open	Closed	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open

Continued on next page . . .

# 3COM CORPORATION

## TOKENLINK

... continued from previous page

I/O BASE ADDRESS				
Address	JP3A	JP3B	JP3C	JP3D
i300h	Closed	Open	Open	Open
310h	Open	Closed	Open	Open
320h	Open	Open	Closed	Open
350h	Open	Open	Open	Closed

PRIMARY/ALTERNATE MODE			
Setting	JP4A	JP4B	JP4C
iSingle card	Open	Open	Closed
Primary	Closed	Open	Open
Alternate	Open	Closed	Open

Note: If two cards are to be used in a single system, one of the cards must be set to primary and the other one must be set to alternate. If only one card is used this option must be set to single.

BOOT ROM ADDRESS				
Address	JP5A	JP5B	JP5C	JP5D
iDisabled	Closed	Open	Open	Open
C4000h	Open	Closed	Open	Open
D4000h	Open	Open	Open	Closed
D6000h	Open	Open	Closed	Open