


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

STANDARD MICROSYSTEMS CORPORATION

SMC3016

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

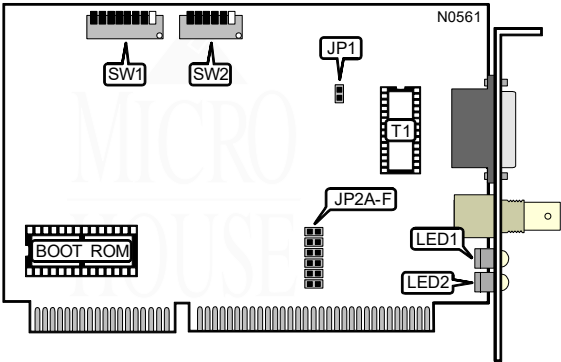

CABLE TYPE		
Type	JP1	Pulse Transformer T1
iRG-58A/U 50ohm coaxial	Open	Installed
AUI transceiver via DB-15 port	Closed	Not installed

INTERRUPT REQUEST						
IRQ	JP2A	JP2B	JP2C	JP2D	JP2E	JP2F
2/9	Open	Open	Open	Open	Closed	Open
i3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
7	Open	Open	Open	Closed	Open	Open
9	Open	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed

Continued on next page . . .

# STANDARD MICROSYSTEMS CORPORATION

## S M C 3 0 1 6

... continued from previous page

I/O BASE ADDRESS							
I/O	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
200	On	On	On	On	Off	On	On
220	Off	On	On	On	Off	On	On
240	On	Off	On	On	Off	On	On
260	Off	Off	On	On	Off	On	On
280	On	On	Off	On	Off	On	On
2A0	Off	On	Off	On	Off	On	On
2C0	On	Off	Off	On	Off	On	On
2E0	Off	Off	Off	On	Off	On	On
i300	On	On	On	Off	Off	On	On
320	Off	On	On	Off	Off	On	On
340	On	Off	On	Off	Off	On	On
360	Off	Off	On	Off	Off	On	On
380	On	On	Off	Off	Off	On	On
3A0	Off	On	Off	Off	Off	On	On
3C0	On	Off	Off	Off	Off	On	On
3E0	Off	Off	Off	Off	Off	On	On

BOOT ROM	
Setting	SW1/8
iDisabled	Open
Enabled	Closed

BASE MEMORY ADDRESS						
Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
C0000h	Off	Off	On	On	On	On
C4000h	Off	Off	On	On	On	Off
C8000h	Off	Off	On	On	Off	On
CC000h	Off	Off	On	On	Off	Off
iD0000h	Off	Off	On	Off	On	On
D4000h	Off	Off	On	Off	On	Off
D8000h	Off	Off	On	Off	Off	On
DC000h	Off	Off	On	Off	Off	Off
E0000h	Off	Off	Off	On	On	On
E4000h	Off	Off	Off	On	On	Off
E8000h	Off	Off	Off	On	Off	On
EC000h	Off	Off	Off	On	Off	Off