


# 3COM CORPORATION

## TOKENLINK III 16/4 (3C619)

<b>NIC Type</b>	Token-Ring
<b>Transfer Rate</b>	4/16Mbps
<b>Data Bus</b>	16-bit ISA
<b>Topology</b>	Token-Ring
<b>Wiring Type</b>	Unshielded twisted pair Shielded twisted pair via DB-9
<b>Boot ROM</b>	Available

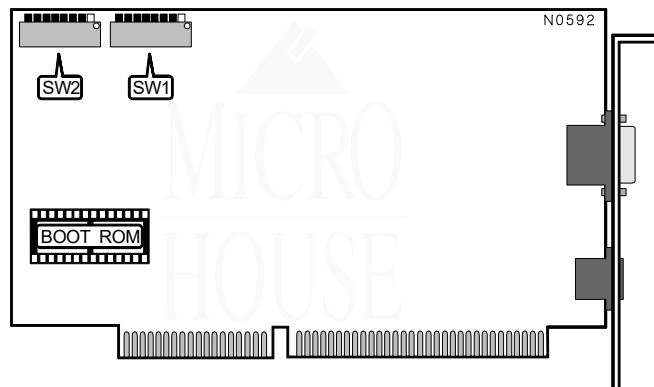

BOOT ROM ADDRESS						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
C0000-C1FFFh	Off	On	On	On	On	On
C2000-C3FFFh	Off	On	On	On	On	Off
C4000-C5FFFh	Off	On	On	On	Off	On
C6000-C7FFFh	Off	On	On	On	Off	Off
C8000-C9FFFh	Off	On	On	Off	On	On
CA000-CBFFFh	Off	On	On	Off	On	Off
CC000-CDFFFh	Off	On	On	Off	Off	On
CE000-CFFFFh	Off	On	On	Off	Off	Off
D0000-D1FFFh	Off	On	Off	On	On	On
D2000-D3FFFh	Off	On	Off	On	On	Off
D4000-D5FFFh	Off	On	Off	On	Off	On
D6000-D7FFFh	Off	On	Off	On	Off	Off
D8000-D9FFFh	Off	On	Off	Off	On	On
DA000-DBFFFh	Off	On	Off	Off	On	Off
DC000-DDFFFh	Off	On	Off	Off	Off	On
DE000-DFFFFh	Off	On	Off	Off	Off	Off

Note: CC000h is the factory setting, and DC000h is the recommended alternate setting.

Continued on next page . . .

# 3COM CORPORATION

## TOKENLINK III-ISA (3C619)

... continued from previous page

INTERRUPT REQUEST		
IRQ	SW1/7	SW1/8
i2/9	On	On
3	On	Off
6	Off	On
7	Off	Off

I/O BASE ADDRESS	
Address	SW2/1
iA20h	Off
A24h	On

SHARED RAM CONFIGURATION		
Size	SW2/2	SW2/3
8KB	On	On
i16KB	Off	On
32KB	On	Off
64KB	Off	Off
Note: This setting configures how much system memory the card will use.		

NETWORK SPEED	
Speed	SW2/4
4Mbps	On
i16Mbps	Off
Note: All cards on a segment must have this option set the same.	

DATA BUS CONFIGURATION	
Data Bus	SW2/5
8-bit	On
16 bit	Off

MISCELLANEOUS NOTES
Switches SW2/6, SW2/7, and SW2/8 are reserved for future use.