


CNET TECHNOLOGY, INC.

C N 2 1 0 E

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8/16-bit ISA
Topology	Linear bus
Wiring Type	Unshielded twisted pair RG58A/U 50ohm coaxial DIX transceiver via DB-15
Boot ROM	Available

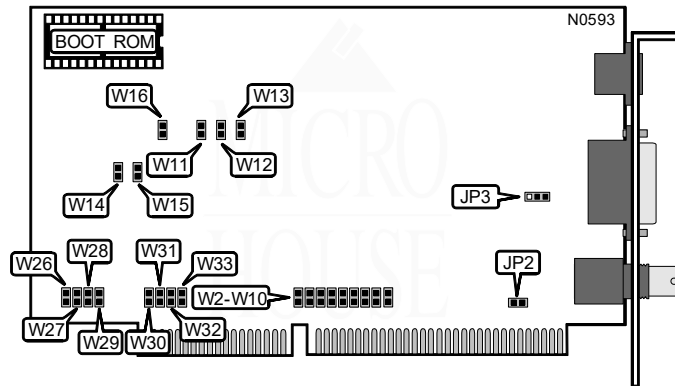

CABLE TYPE	
Type	JP2
Unshielded twisted pair	Open
RG58A/U 50ohm coaxial	Closed
DIX transceiver via DB-15 port	Open

INTERRUPT SETTINGS									
IRQ	W2	W3	W4	W5	W6	W7	W8	W9	W10
2/9	Closed	Open	Open	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Closed

Continued on next page . . .

... continued from previous page

BOOT ROM	
Setting	W11
Disabled	Open
Enabled	Closed

BOOT ROM ADDRESS		
Address	W12	W13
C8000h	Closed	Closed
CC000h	Closed	Open
D0000h	Open	Closed
D4000h	Open	Open

BASE I/O ADDRESS		
Address	W14	W15
300h	Open	Open
320h	Open	Closed
340h	Closed	Open
360h	Open	Open

WAIT STATE CONFIGURATION	
Wait State(s)	W16
0 wait states	Closed
1 wait state	Open

DMA CHANNEL								
Channel	W26	W27	W28	W29	W30	W31	W32	W33
DMA3	Closed	Open	Open	Open	Closed	Open	Open	Open
DMA5	Open	Open	Open	Closed	Open	Open	Open	Closed
DMA6	Open	Open	Closed	Open	Open	Open	Closed	Open
DMA7	Open	Closed	Open	Open	Open	Closed	Open	Open

Continued on next page ...

CNET TECHNOLOGY, INC.
C N 2 1 0 E

... continued from previous page

TERMINATOR	
Setting	JP1
Unterminated	Pins 2 & 3 closed
Coaxial linear-bus terminated by card	Pins 1 & 2 closed