


CNET TECHNOLOGY, INC.

C N 5 0 0 E

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear bus
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15
Boot ROM	Available

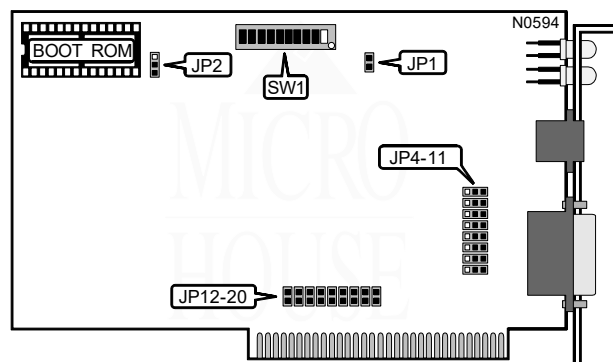

LINK INTEGRITY	
Function	JP1
iLink integrity enabled	Closed
Link integrity disabled	Open
Note: If card is used in a pre-10BaseT cabling network, disable the link integrity function.	

BOOT ROM	
Setting	JP2
iDisabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

CABLE TYPE	
Type	JP4-JP11
Unshielded twisted pair	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

Continued on next page . . .

... continued from previous page

INTERRUPT SETTINGS					
IRQ	JP12	JP13	JP14	JP15	JP16
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP17	JP18	JP19	JP20
Disabled	Open	Open	Open	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

BOOT ROM ADDRESS						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
C0000h	On	On	On	On	On	On
C2000h	On	On	On	On	On	Off
C4000h	On	On	On	On	Off	On
C6000h	On	On	On	On	Off	Off
C8000h	On	On	On	Off	On	On
CA000h	On	On	On	Off	On	Off
CC000h	On	On	On	Off	Off	On
CE000h	On	On	On	Off	Off	Off
D0000h	On	On	Off	On	On	On
D2000h	On	On	Off	On	On	Off
D4000h	On	On	Off	On	Off	On
D6000h	On	On	Off	On	Off	Off
D8000h	On	On	Off	Off	On	On
DA000h	On	On	Off	Off	On	Off
DC000h	On	On	Off	Off	Off	On
DE000h	On	On	Off	Off	Off	Off
E0000h	On	Off	On	On	On	On

BASE I/O ADDRESS				
Address	SW1/7	SW1/8	SW1/9	SW1/10
280h	On	Off	On	On
2A0h	On	Off	On	Off
2C0h	On	Off	Off	On
300h	On	Off	Off	Off
320h	Off	On	On	Off
340h	Off	On	Off	On
360h	Off	On	Off	Off