


KATRON TECHNOLOGIES, INC.
16/4 TOKEN RING ADAPTER

NIC Type Token ring
Transfer Rate 4/16Mbps
Data Bus 16-bit ISA
Topology Linear bus
Wiring Type AUJ transceiver via DB-15 port
 Unshielded twisted pair
Boot ROM Not available

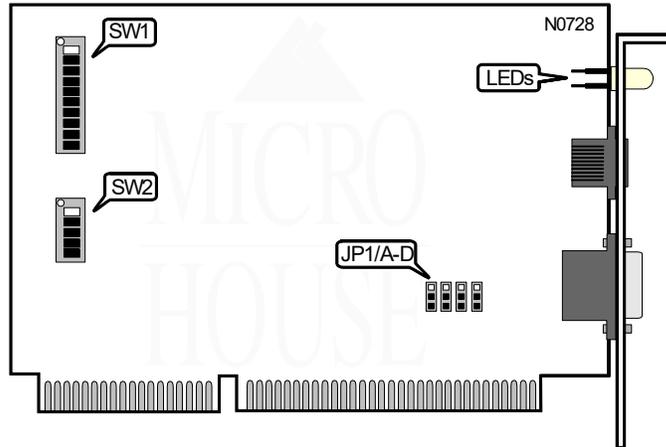

BASE ADDRESS SELECT					
Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5
CC000h	Off	Off	On	On	Off
C0000h	Off	Off	Off	Off	Off
C2000h	Off	Off	Off	Off	On
C4000h	Off	Off	Off	On	Off
C6000h	Off	Off	Off	On	On
C8000h	Off	Off	On	Off	Off
CA000h	Off	Off	On	Off	On
CE000h	Off	Off	On	On	On
D0000h	Off	On	Off	Off	Off
D2000h	Off	On	Off	Off	On
D4000h	Off	On	Off	On	Off
D6000h	Off	On	Off	On	On
D8000h	Off	On	On	Off	Off
DA000h	Off	On	On	Off	On
DC000h	Off	On	On	On	Off
DE000h	Off	On	On	On	On

Continued on next page . . .

KATRON COMPUTERS, INC.

16/4 TOKEN RING ADAPTER

... continued from previous page

INTERRUPT SELECT				
IRQ	SW1/7	SW1/8	SW1/9	SW1/10
í IRQ2	On	Off	Off	Off
IRQ3	Off	On	Off	Off
IRQ6	Off	Off	On	Off
IRQ7	Off	Off	Off	On

PRIMARY/ALTERNATE CARD	
Setting	SW1/1
í Primary	Off
Alternate	On

SHARED RAM SIZE				
Size	SW1/3	SW1/4	SW1/5	SW1/6
í 16KB	Off	On	Off	Off
8KB	On	Off	Off	Off
32KB	Off	Off	On	Off
64KB	Off	Off	Off	On

DATA RATE	
Setting	SW1/2
í 4Mbps	Off
16Mbps	On


CABLE TYPE				
Type	JP1/A	JP1/B	JP1/C	JP1/D
AUI transceiver via DB-15 port	Pins 2 & 3			
Unshielded twisted pair	Pins 1 & 2			

Note: All Pins designated should be placed in the closed position.

Continued on next page ...

KATRON COMPUTERS, INC.
16/4 TOKEN RING ADAPTER

... continued from previous page



DIAGNOSTIC LEDs		
LE 1 (Green)	LE 2 (Yellow)	Condition
Off	Off	Network connection is broken, or software initialization is unsuccessful.
Off	Blinking	Data is being transmitted, but the network connection is broken.
On	Off	Adapter failure
On	On	Network connection is good.