


HEWLETT-PACKARD COMPANY  
HP 27236A

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear bus
	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

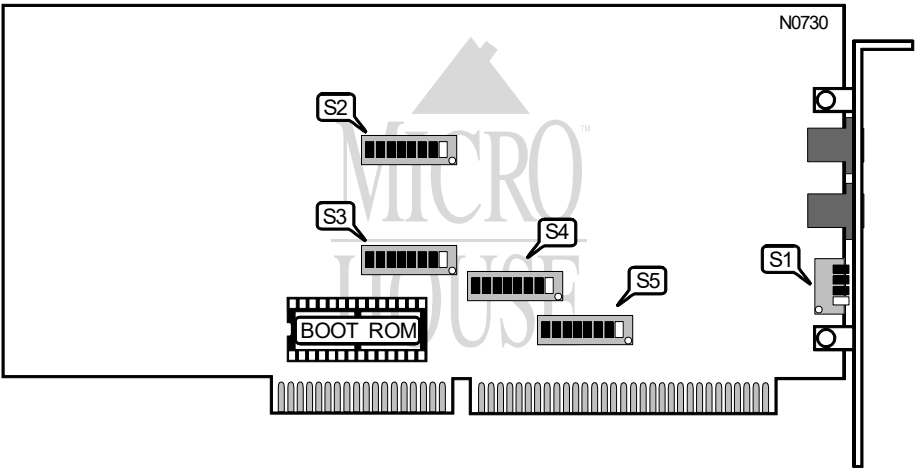

BOOT ROM	
Setting	S2/7
Disabled	On
Enabled	Off

BASE MEMORY ADDRESS								
Address	S3/1	S3/2	S3/S	S3/4	S3/5	S3/6	S3/7	S3/8
EC000h	On	On	On	Off	On	On	Off	Off
FF000h	On	On	On	On	On	On	On	On
EB000h	On	On	On	Off	On	Off	On	On
ED000h	On	On	On	Off	On	On	Off	On
EF000h	On	On	On	Off	On	On	On	On
Disabled	Off	Off	Off	Off	Off	Off	Off	Off

DMA CONFIGURATION						
DMA	S5/1	S5/2	S5/3	S5/4	S5/5	S5/6
1	Off	Off	On	Off	Off	On
2	Off	On	Off	Off	On	Off
3	On	Off	Off	On	Off	Off

Continued on next page . . .

**HEWLETT-PACKARD COMPANY**  
**HP 27236A**

... continued from previous page

I/O ADDRESS CONFIGURATION						
Address	S2/1	S2/2	S2/3	S2/4	S2/5	S2/6
i 300h	On	On	Off	Off	Off	Off
200h	On	Off	Off	Off	Off	Off
250h	On	Off	Off	On	Off	On
260h	On	Off	Off	On	On	Off
280h	On	Off	On	Off	Off	Off
290h	On	Off	On	Off	Off	On
2A0h	On	Off	On	Off	On	Off
2B0h	On	Off	On	Off	On	On
2C0h	On	Off	On	On	Off	Off
2D0h	On	Off	On	On	Off	On
330h	On	On	Off	Off	On	On
340h	On	On	Off	On	Off	Off
350h	On	On	Off	On	Off	On
3F0h	On	On	On	On	On	On

INTERRUPT SETTINGS						
IRQ	S4/1	S4/2	S4/3	S4/4	S4/5	S4/6
i IRQ3	Off	Off	Off	Off	On	Off
IRQ4	Off	Off	Off	On	Off	Off
IRQ5	Off	Off	On	Off	Off	Off
IRQ7	On	Off	Off	Off	Off	Off

LOOPBACK	
Mode	S1/1
iNormal	To the right position
Test	To the left position

FACTORY CONFIGURED SETTINGS	
Switch	Setting
S1/1	N/A
S1/2	N/A
S1/3	N/A
S2/8	N/A
S4/7	N/A
S4/8	N/A
S5/7	N/A
S5/8	N/A