



Chapter 5: Jumper Settings
PURE DATA, LTD.
PDI8023PLUSII-16CA

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

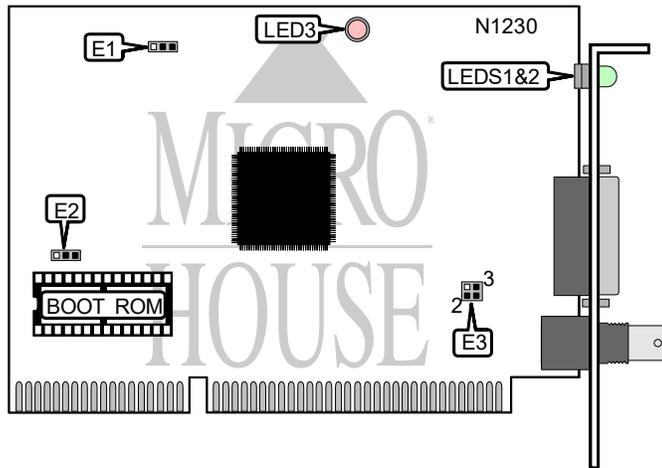

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
PUREDATA
PDI8023PLUSII-16CA

... continued from previous page.

BOOT ROM CONFIGURATION	
Setting	E1
Enabled	pins 1 & 2 closed
Disabled	pins 2 & 3 closed

ROM SIZE SELECTION	
Size	E2
64KB	pins 1 & 2 closed
128KB	pins 1 & 2 closed
256KB	pins 2 & 3 closed

NETWORK DISTANCE CONFIGURATION	
Distance	E3
=< 185 meters	pins 1 & 2 closed
> 185, -<300 meters	pins 3 & 4 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network activity detected
LED1	Green	Off	Network activity not detected
LED2	Red	On	Card activity detected
LED2	Red	Off	Card activity not detected
LED3	Red	On	Network collision detected
LED3	Red	Off	Network collision not detected