


Chapter 5: Jumper Settings **KT TECHNOLOGY PTE LTD.** **K T N - 9 0 3**

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

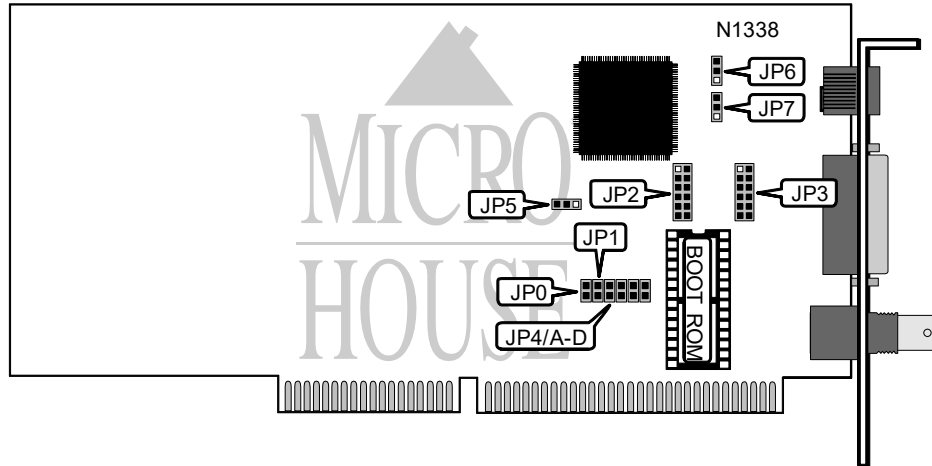

FACTORY CONFIGURED	
Jumper	Position
JP6	not identified

CABLE TYPE SELECTION			
Cable Type	JP2	JP3	JP7
Unshielded twisted pair	Open	Open	pins 1 & 2 closed
AUI Transceiver via DB-15 port	Open	Closed	pins 2 & 3 closed
RG-58A/U 50ohm coaxial	Closed	Open	pins 2 & 3 closed

BASE I/O ADDRESS SELECTION		
Address	JP0	JP1
i 300h	Closed	Closed
320h	Open	Closed
340h	Closed	Open
360h	Open	Open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
KT TECHNOLOGY PTE LTD.
K T N - 9 0 3

... continued from previous page.

INTERRUPT CONFIGURATION				
Address	JP4/A	JP4/B	JP4/C	JP4/D
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed
9	Closed	Open	Open	Open

BOOT ROM CONFIGURATION	
Setting	JP5
Enabled	pins 1 & 2 closed
Disabled	pins 2 & 3 closed