


Chapter 5: Jumper Settings

GVC TECHNOLOGIES, INC.

16-BIT THREE-IN-ONE

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded Twisted Pair
	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
	RG-58C/A
Boot ROM	Available

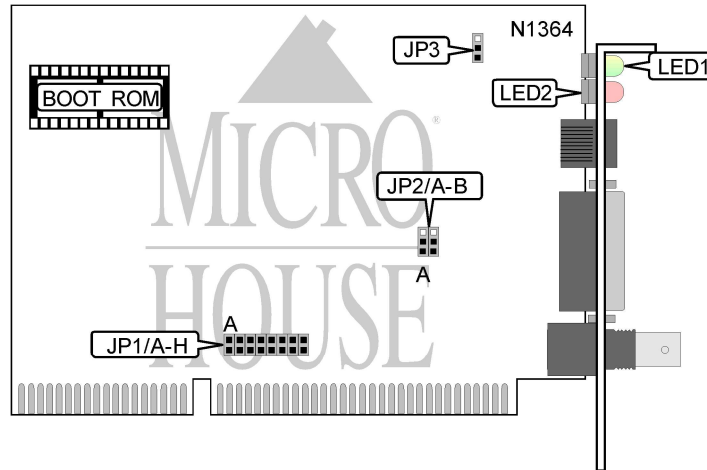

BOOT ROM CONFIGURATION			
Setting		JP1/A	
Enabled		Closed	
Disabled		Open	

ADDRESS SELECTION			
Base I/O Address	Boot ROM Address	JP1/B	JP1/C
300h	C800h	Closed	Closed
320h	CC00h	Open	Closed
340h	D000h	Closed	Open
360h	D400h	Open	Open

WAIT STATE CONFIGURATION	
Wait states	
JP1/D	
Enabled	Closed
Disabled	Open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
GVC TECHNOLOGIES, INC.
16-BIT THREE-IN-ONE

... continued from previous page.

INTERRUPT SELECTION				
IRQ	JP1/E	JP1/F	JP1/G	JP1/H
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open
9	Open	Open	Open	Closed

CABLE TYPE SELECTION		
Cable Type	JP2/A	JP2/B
Unshielded Twisted Pair	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI Transceiver via DB-15 port	Pins 2 & 3 closed	Pins 1 & 2 closed
RG58A/U 50ohm coaxial	Pins 1 & 2 closed	Pins 1 & 2 closed

LINK TEST CONFIGURATION	
Setting	JP3
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green/Red	On	Data is not being transmitted/received
LED1	Green/Red	Off	Data is being transmitted/received
LED2	Green	On	10Base-T network connection is good
LED2	Green	Off	10Base-T network connection is broken or JP2/B is disabled