


Chapter 5: Jumper Settings

GVC TECHNOLOGIES, INC.

8-BIT THREE-IN-ONE

| | |
|----------------------|--------------------------------|
| NIC Type | Ethernet |
| Transfer Rate | 10Mbps |
| Data Bus | 8-bit ISA |
| Topology | Linear Bus/Star |
| Wiring Type | Unshielded Twisted Pair |
| | AUI Transceiver via DB-15 port |
| | RG58A/U 50ohm coaxial |
| | RG-58C/A |
| Boot ROM | Available |

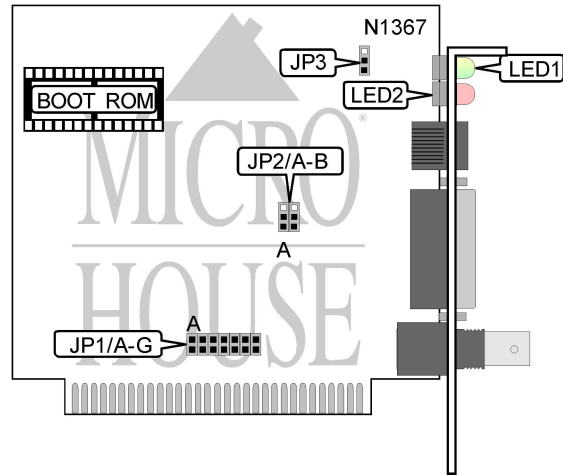

| BOOT ROM CONFIGURATION | |
|------------------------|--------|
| Setting | JP1/A |
| Enabled | Closed |
| Disabled | Open |

| ADDRESS SELECTION | | | |
|-------------------|------------------|--------|--------|
| Base I/O Address | Boot ROM Address | JP1/B | JP1/C |
| 300h | C800h | Closed | Closed |
| 320h | CC00h | Open | Closed |
| 340h | D000h | Closed | Open |
| 360h | D400h | Open | Open |

| INTERRUPT SELECTION | | | | |
|---------------------|--------|--------|--------|-------|
| IRQ | JP1/D | JP1/E | JP1/F | JP1/G |
| 3 | Closed | Open | Open | Open |
| 4 | Open | Closed | Open | Open |
| 5 | Open | Open | Closed | Open |

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
GVC TECHNOLOGIES, INC.
8-BIT THREE-IN-ONE

... continued from previous page.

| CABLE TYPE SELECTION | | |
|--------------------------------|-------------------|-------------------|
| Cable Type | JP2/A | JP2/B |
| Unshielded Twisted Pair | Pins 2 & 3 closed | Pins 2 & 3 closed |
| AUI Transceiver via DB-15 port | Pins 2 & 3 closed | Pins 1 & 2 closed |
| RG58A/U 50ohm coaxial | Pins 1 & 2 closed | Pins 1 & 2 closed |

| LINK TEST CONFIGURATION | |
|-------------------------|-------------------|
| Setting | JP3 |
| Enabled | Pins 1 & 2 closed |
| Disabled | Pins 2 & 3 closed |

| DIAGNOSTIC LED(S) | | | |
|-------------------|-----------|--------|--|
| LED | Color | Status | Condition |
| LED1 | Green/Red | On | Data is not being transmitted/received |
| LED1 | Green/Red | Off | Data is being transmitted/received |
| LED2 | Green | On | 10Base-T network connection is good |
| LED2 | Green | Off | 10Base-T network connection is broken or JP2/B is disabled |