


EDIMAX COMPUTER COMPANY

2000R

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

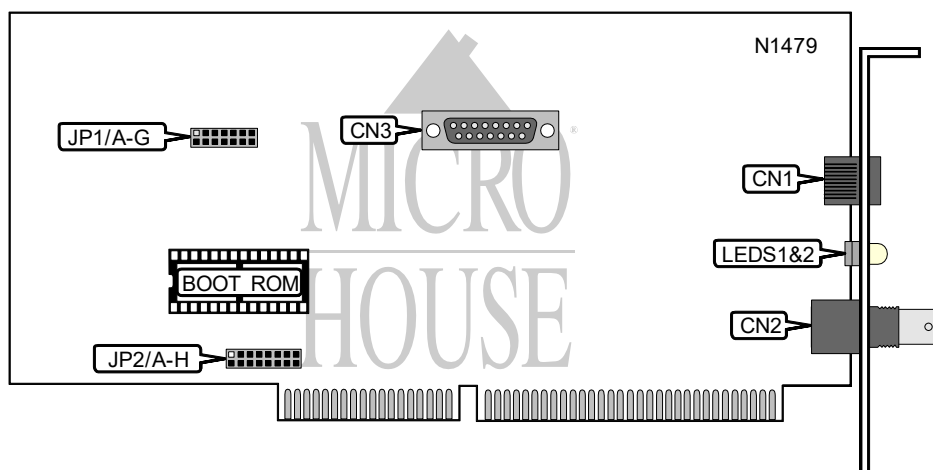

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	AUI transceiver via DB-15 port	CN3
RG-58A/U 50ohm coaxial port	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
BOOT ROM enabled	JP1/G	Closed	
BOOT ROM disabled	JP1/G	Open	
Configuration select software	JP2/H	Closed	
Configuration select hardware	JP2/H	Open	

BIOS ADDRESS SELECTION			
Address	JP1/D	JP1/E	JP1/F
C0000h	Open	Open	Open
C4000h	Closed	Open	Open
C8000h	Open	Closed	Open
CC000h	Closed	Closed	Open
D0000h	Open	Open	Closed
D4000h	Closed	Open	Closed
D8000h	Open	Closed	Closed
DC000h	Closed	Closed	Closed

Continued on next page. . .

EDIMAX COMPUTER COMPANY

2000RA

. . . continued from previous page

BASE I/O ADDRESS SELECTION			
Setting	JP1/A	JP1/B	JP1/C
200h	Open	Open	Closed
220h	Closed	Open	Closed
240h	Open	Closed	Closed
260h	Closed	Closed	Closed
300h	Open	Open	Open
320h	Closed	Open	Open
340h	Open	Closed	Open
360h	Closed	Closed	Open

INTERRUPT SELECTION							
IRQ	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G
2/9	Open	Open	Open	Open	Open	Open	Open
3	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Closed	Open	Open
10	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Power is on
LED1	Red	Blinking	Data is being transmitted
LED1	Red	Off	Power is off
LED2	Green	On	10Base-T network connection is good
LED2	Green	Off	10Base-T network connection is broken
Note: The exact locations of LED1 and LED2 are unidentified.			