


IET STARTECH LANSTAR 2000C

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

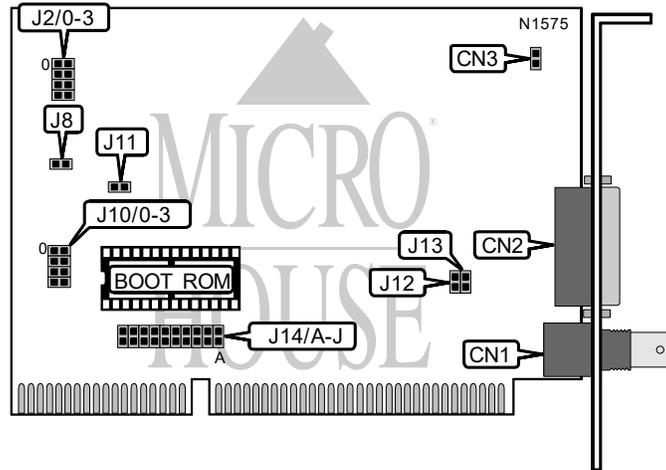

CONNECTIONS			
Function	Label	Function	Label
RG-58A/U 50ohm coaxial	CN1	External LED connector	CN3
AUI transceiver via DB-15 port	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Mainboard compatibility normal	J8	Open	
Mainboard compatibility abnormal	J8	Closed	
NE1000 compatible	J11	Closed	
NE2000 compatible	J11	Open	

BASE I/O ADDRESS SELECTION				
Address	J10/0	J10/1	J10/2	J10/3
200h	Open	Closed	Closed	Closed
220h	Open	Closed	Closed	Open
240h	Open	Closed	Open	Closed
260h	Open	Closed	Open	Open
280h	Open	Open	Closed	Closed
2A0h	Open	Open	Closed	Open
2C0h	Open	Open	Open	Closed
í 300h	Closed	Closed	Closed	Closed
320h	Closed	Closed	Closed	Open
340h	Closed	Closed	Open	Closed
360h	Closed	Closed	Open	Open
380h	Closed	Open	Closed	Closed

Continued on next page. . .

IET STARTECH LANSTAR 2000A

. . . continued from previous page

INTERRUPT SELECTION										
IRQ	J14/A	J14/B	J14/C	J14/D	J14/E	J14/F	J14/G	J14/H	J14/I	J14/J
2	Closed	Open								
3	Open	Closed	Open							
4	Open	Open	Closed	Open						
5	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Closed	Open	Open						
14	Open	Closed	Open							
15	Open	Closed								

CABLE TYPE SELECTION		
Type	J12	J13
AUI transceiver via DB-15 port	Open	Closed
í RG-58A/U 50ohm coaxial	Closed	Open

BOOT ROM CONFIGURATION	
Setting	J2/3
Enabled	Closed
í Disabled	Open

ROM ADDRESS SELECTION			
Address	J2/0	J2/1	J2/2
C000:0h	Open	Open	Open
C400:0h	Open	Open	Closed
C800:0h	Open	Closed	Open
CC00:0h	Open	Closed	Closed
D000:0h	Closed	Open	Open
D400:0h	Closed	Open	Closed
D800:0h	Closed	Closed	Open
DC00:0h	Closed	Closed	Closed