


EDIMAX COMPUTER COMPANY

EN-2000PXA (VER. 2)

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

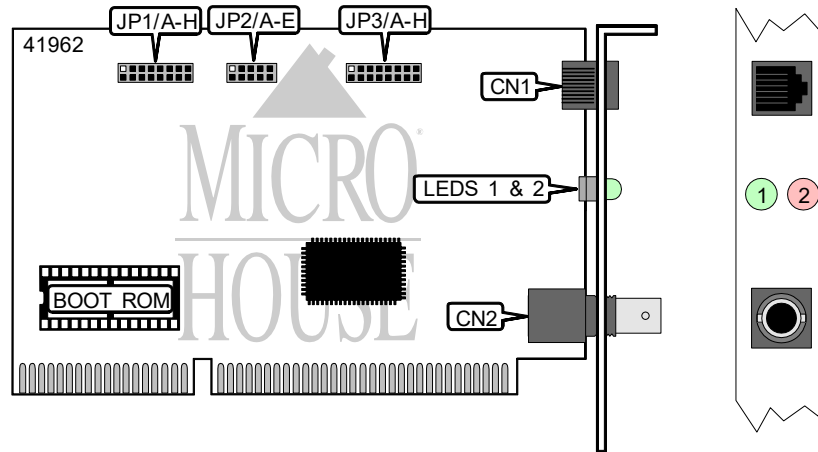

CONNECTIONS			
Function	Label	Function	Label
RJ-45 connector	CN1	BNC connector	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured - do not alter.	JP1/8	Unidentified

BASE I/O ADDRESS SELECT				
Address	JP1/A	JP1/B	JP1/C	JP1/D
200h	Open	Closed	Open	Open
220h	Open	Closed	Open	Closed
240h	Open	Closed	Closed	Open
260h	Open	Closed	Closed	Closed
280h	Closed	Closed	Open	Open
2A0h	Closed	Closed	Open	Closed
2C0h	Closed	Closed	Closed	Open
2E0h	Closed	Closed	Closed	Closed
300h	Open	Open	Open	Open
320h	Open	Open	Open	Closed
340h	Open	Open	Closed	Open
360h	Open	Open	Closed	Closed
380h	Closed	Open	Open	Open
3A0h	Closed	Open	Open	Closed
3C0h	Closed	Open	Closed	Open
3E0h	Closed	Open	Closed	Closed

Continued on next page . . .

EDIMAX COMPUTER COMPANY

EN-2000PXA (VER. 2)

... continued from previous page

IRQ SELECT			
IRQ	JP1/E	JP1/F	JP1/G
2/9	Open	Open	Open
3	Open	Open	Closed
4	Open	Closed	Open
5	Open	Closed	Closed
10	Closed	Open	Open
11	Closed	Open	Closed
12	Closed	Closed	Open
15	Closed	Closed	Closed

BOOT ROM ADDRESS SELECT						
Address	Size	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
C0000h	16K	Closed	Open	Open	Open	Open
C4000h	16K	Closed	Open	Open	Open	Closed
C8000h	16K	Closed	Open	Open	Closed	Open
CC000h	16K	Closed	Open	Open	Closed	Closed
D0000h	16K	Closed	Open	Closed	Open	Open
D4000h	16K	Closed	Open	Closed	Open	Closed
D8000h	16K	Closed	Open	Closed	Closed	Open
DC000h	16K	Closed	Open	Closed	Closed	Closed
C0000h	32K	Open	Closed	Open	Open	Open
C8000h	32K	Open	Closed	Open	Open	Closed
D0000h	32K	Open	Closed	Open	Closed	Open
D8000h	32K	Open	Closed	Open	Closed	Closed
C0000h	64K	Open	Closed	Closed	Open	Open
D0000h	64K	Open	Closed	Closed	Open	Closed
Boot ROM disabled	None	Open	Open	Open	Open	Open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	UTP link is good
LED1	Green	Off	UTP link is broken
LED2	Red	On	Power enabled
LED2	Red	Blinking	Network activity present
LED2	Red	Off	Power/network activity disabled