


3COM CORPORATION

FDDILINK (3C805)

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	100Mbps
Topology	Ring, Peer-Peer
Wiring Type	Unshielded twisted pair
	Fiber optic cable
Data Bus	32-bit PCI

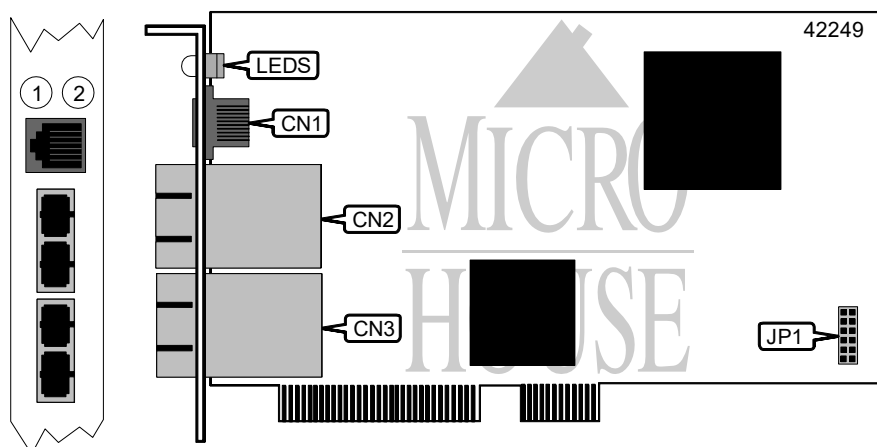

CONNECTIONS			
Function	Label	Function	Label
UTP via RJ-11 connector	CN1	Fiber optic connector – SC (Port B)	CN3
Fiber optic connector – SC (Port A)	CN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured – do not alter.	JP1	Unidentified

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good (Port A)
LED1	Amber	On	Error condition (Port A)
LED1	N/A	Off	Network connection is broken (Port A)
LED2	Green	On	Network connection is good (Port B)
LED2	Amber	On	Error condition (Port B)
LED2	N/A	Off	Network connection is broken (Port B)