


CISCO SYSTEMS, INC.

FDDI EISA SGI DUAL ATTACHMENT ADAPTER

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	10Mbps
Topology	Ring, Peer to peer
Wiring Type	Fiber optic cable
Data Bus	32-bit EISA

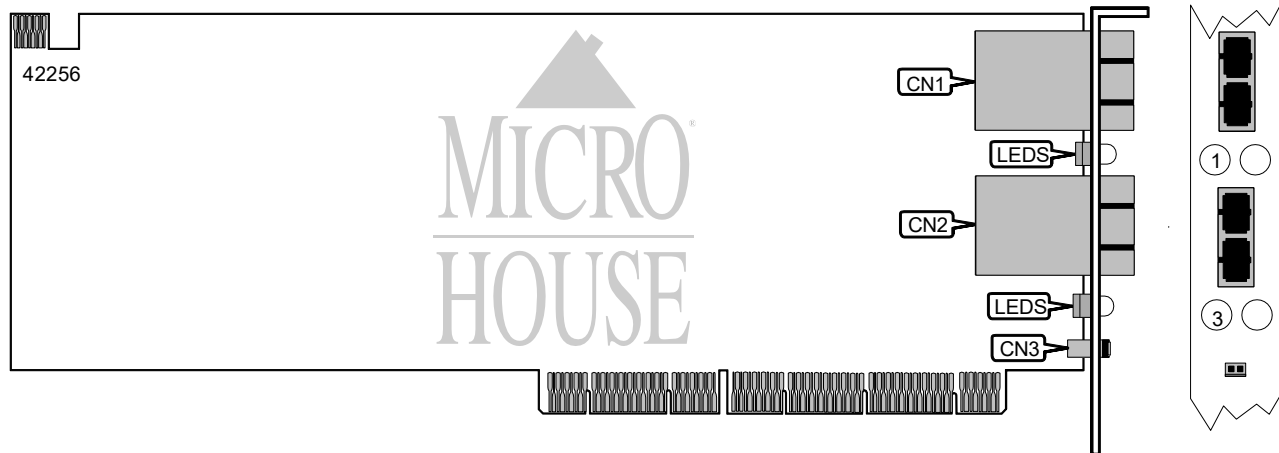

CONNECTIONS			
Function	Label	Function	Label
Fiber optic connector - SC (Port B)	CN1	2-pin mini DIN connector (Bypass Switch)	CN3
Fiber optic connector - SC (Port A)	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Unidentified	On	Internal diagnostics tests passed (Port B)
LED1	Unidentified	Off	Internal diagnostics tests failed (Port B)
LED3	Unidentified	On	Internal diagnostics tests passed (Port A)
LED3	Unidentified	Off	Internal diagnostics tests failed (Port A)

DIAGNOSTIC LED(S) CONTINUED		
LED2	LED4	Condition
Off	Off	Ring is not operational
Off	Green	Station is in wrap B. Ring is an operational SAS. Ring A is not a connected DAS.
Off	Orange	Ring is not operational. Station connected to Port B attempting to connect, but has failed.
Green	Off	Station is in wrap A. Ring B not connected.
Green	Green	Station is in thru mode. Ring is operational.
Green	Orange	Station is in wrap A. Station connected to Port B is attempting to connect, but has failed.
Orange	Off	Ring is not operational. Station connected to Port A is attempting to connect, but has failed.
Orange	Green	Station is in wrap B. Station connected to Port A is attempting to connect, but has failed. (Normal if station is dual homed.)
Orange	Orange	Ring is not operational. Stations connected to Port A and Port B are attempting to connect, but have failed.