


# CISCO SYSTEMS, INC. CISCOPRO PC CARD

<b>Card Type</b>	ISDN to Ethernet router
<b>Chipset</b>	Unidentified
<b>Maximum Onboard Memory</b>	Unidentified
<b>I/O Options</b>	Serial ports (2)
<b>Network Transfer Rate</b>	10Mbps
<b>ISDN Transfer Rate</b>	64Kbps x 2
<b>ISDN Protocol</b>	Unidentified
<b>Switch Type</b>	Unidentified
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Star
<b>Wire Type</b>	Unshielded twisted pair

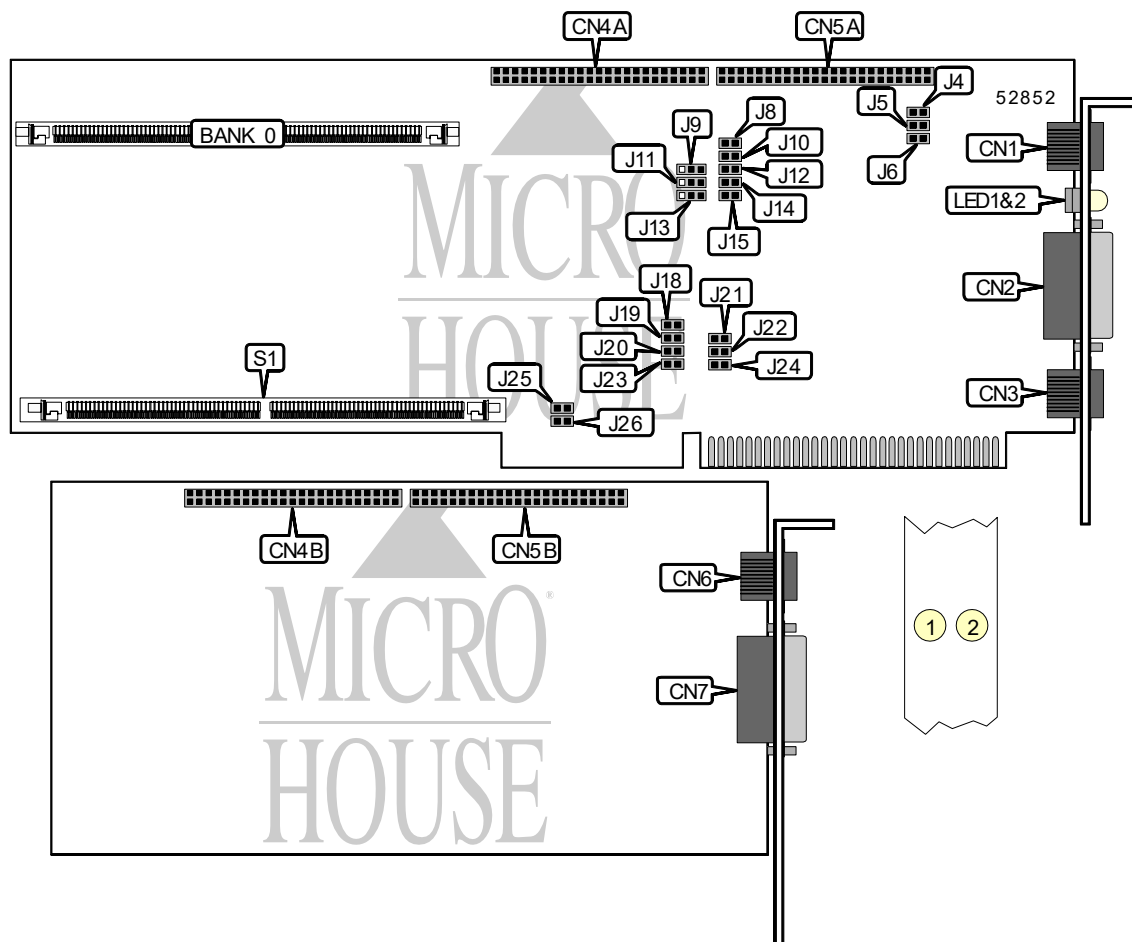

Continued on next page. . .

# CISCO SYSTEMS, INC.

## CISCOPRO PC CARD

... continued from previous page

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair connector	CN1	Daughterboard header (on back of card)	CN5A
RS-232, RS-449, RS-530, X.21, or V.35 serial port 1 via DB-60 connector	CN2	Header to main board	CN5B
Auxiliary port	CN3	ISDN line out	CN6
Daughterboard header (on back of card)	CN4A	RS-232, RS-449, RS-530, X.21, or V.35 serial port 2 via DB-60 connector	CN7
Header to main board	CN4B	Firmware on 80-pin SIMM	S1
Note: Daughterboard is included on CPA2500-PCI model only.			

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	J4	Open
í Factory configured - do not alter	J5	Closed
í Factory configured - do not alter	J6	Open
í Factory configured - do not alter	J8	Open
í Factory configured - do not alter	J9	Pins 1 & 2 closed
í Factory configured - do not alter	J10	Open
í Factory configured - do not alter	J11	Pins 1 & 2 closed
í Factory configured - do not alter	J12	Closed
í Factory configured - do not alter	J13	Pins 2 & 3 closed
í Factory configured - do not alter	J14	Open
í Factory configured - do not alter	J15	Open
í Factory configured - do not alter	J21	Open
í Factory configured - do not alter	J22	Open
í Factory configured - do not alter	J23	Open
í Factory configured - do not alter	J24	Open
í Factory configured - do not alter	J25	Closed
í Factory configured - do not alter	J26	Closed

SERIAL PORT 1 ADDRESS SELECTION		
Setting	J18	J19
3F8h (COM1:)	Closed	Closed
í 2F8h (COM2:)	Open	Closed
3E8h (COM3:)	Closed	Open
2E8h (COM4:)	Open	Open

SERIAL PORT 1 INTERRUPT SELECTION		
Setting	J20	J23
í IRQ3	Closed	Open
IRQ4	Open	Closed

DIAGNOSTIC LED(S)
The colors and functions of the LEDs are unidentified.