


GATEWAY COMMUNICATIONS, INC. G/EtherNet 8 Adapter (FUJITSU CHIPSET)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
Boot ROM Available

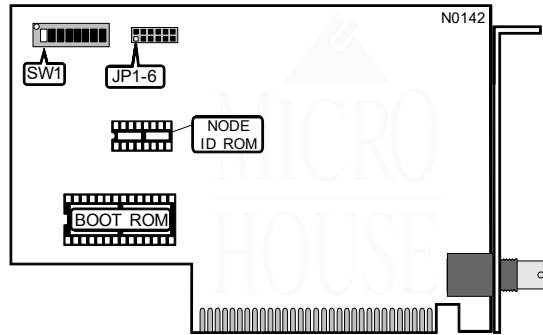

| INTERRUPT REQUEST | | | | | | |
|-------------------|--------|--------|--------|--------|--------|--------|
| IRQ | JP1 | JP2 | JP3 | JP4 | JP5 | JP6 |
| 2 | Closed | Open | Open | Open | Open | Open |
| 3 | Open | Closed | Open | Open | Open | Open |
| 4 | Open | Open | Closed | Open | Open | Open |
| i5 | Open | Open | Open | Closed | Open | Open |
| 6 | Open | Open | Open | Open | Closed | Open |
| 7 | Open | Open | Open | Open | Open | Closed |

| I/O BASE ADDRESS | | | |
|------------------|-------|-------|-------|
| Address | SW1/1 | SW1/2 | SW1/3 |
| 260-27F | On | On | On |
| 280-29F | Off | On | On |
| i2A0-2BF | On | Off | On |
| 2E0-2FF | Off | Off | On |
| 300-31F | On | On | Off |
| 320-33F | Off | On | Off |
| 380-39F | On | Off | Off |
| 3E0-3FF | Off | Off | Off |

Continued on next page . . .

... continued from previous page

| BOOT ROM ADDRESS | | | |
|------------------|-------|-------|-------|
| PROM Address | SW1/4 | SW1/5 | SW1/6 |
| C4000-C7FFF | On | On | On |
| C8000-CBFFF | Off | On | On |
| CC000-CFFFF | On | Off | On |
| D0000-D3000 | Off | Off | On |
| D4000-D7000 | On | On | Off |
| D8000-DBFFF | Off | On | Off |
| DC000-DFFFF | On | Off | Off |
| Disabledd | Off | Off | Off |

| WAIT STATE | |
|----------------------------|-------|
| Setting | SW1/7 |
| iZero wait states disabled | Off |
| Zero wait states enabled | On |

| MISCELLANEOUS NOTES |
|---|
| Different drivers must be used for the National & the Fujitsu chipset cards, & are not interchangeable. Fujitsu adapters may be used for either 8 or 16 bit Fujitsu cards. While the National chipset cards require a different driver for an 8 or 16 bit card. |